

# CATALOG

— 2026 —





## Who is LW Flooring?

From our humble beginnings in 2007 in Gainesville, Florida, LW Flooring has been built on a foundation of not just quality products that are built to last, but quality in our people and the relationships we build over the years.

Yes, we sell gorgeous engineered hardwood, tough as nails vinyl plank and laminate hard surface products. We also sell the simplicity of beauty, refinement, vision, purpose, lasting quality, and our people understand this in every one of our collections. These collections are carefully thought out for your home or project.

At LW Flooring we can't wait to meet your vision, gain your trust, and help you find the floor you can fall in love with!

## Our Mission.

LW Flooring is a Florida based flooring distributor that is on a mission to help bring unmatched beauty, durability, sustainability, inspiration, along with high quality products and services to our partners and their clients. We inspire our partners with vision and reward them with incredible service while striving to expand our market leadership. At LW Flooring we believe it is not just a floor, but **"A Lifetime of Memories"**.



### Navigate our Table of Contents.

To visit collection webpages, please select or scan the QR Codes on the appropriate catalog page, or visit our website at lwflooring.com.

## Engineered Hardwood

Paradise Island.....	5
Pristine.....	7
Vintage Elegance.....	9
Renaissance.....	11
Sonoma Valley.....	13
French Impressions.....	16
Traditions.....	18

## Waterproof Vinyl

Grand Coast.....	23
Riverside.....	25
Riverstone.....	28
Lakeview.....	31
Shires.....	34
Metro Luxe.....	36
Uptown Avenue.....	38
Township.....	40

## Laminate

Montclair.....	42
Odyssey.....	44
Cascades.....	47

## Adhesive

Bostik Adhesive.....	50
----------------------	----



# ENGINEERED HARDWOOD



LW Flooring is proud to present our full line of engineered wood flooring that was envisioned & designed to exceed the demands of builders, interior designers, architects, and residential consumers.

**NAPOLI**  
RENAISSANCE COLLECTION | RCW014NA7



The Paradise Island Collection is a true masterpiece that can transform any space with its elegant refinement, natural beauty and sophistication. Featuring 10-1/4" wide European Oak planks 5/8" thick and up to 86-5/8" in length along with a 4mm wire-brushed veneer, this collection is the perfect union of nature's splendor and human artistry. From the shoreline to the ridgeline- Paradise Island is at home anywhere.



**Alimia**  
PIWO15A10



**Bali**  
PIWO15B10



**Caicos**  
PIWO15C10



**Fiji**  
PIWO15F10



**Hawea**  
PIWO15HA10



**Maui**  
PIWO15M10



**Nevis**  
PIWO15N10



**Oahu**  
PIWO15O10



**Paxos**  
PIWO15PA10



**Rosario**  
PIWO15R10




**Tahiti**  
PIWO15T10


# FACT SHEET

Specifications	
<b>Size</b>	5/8" x 10-1/4" x RL up to 86-5/8"
<b>Species</b>	European White Oak
<b>Finish</b>	Polyurethane with Aluminum Oxide
<b>Surface</b>	Wirebrushed
<b>Edge Treatment</b>	Micro-Bevel
<b>Face Veneer</b>	Sawn Face
<b>Color Variation</b>	Low/Medium/High
<b>Light Sensitivity</b>	Low/Medium
<b>Gloss Level</b>	All Colors <8
<b>Certification</b>	Lacey Act & Carb II Compliant
<b>Installation</b> *(on, above, or below grade)	Float, Glue Down, Nail
<b>Milling</b>	Tongue and Groove
<b>Packaging</b>	36.94 sq/ft per carton 1477.6 sq/ft per pallet 40 cartons per pallet
<b>Warranty</b>	Lifetime Residential Warranty 5 Year Light Commercial


\*See full warranty at [LWFFlooring.com](http://LWFFlooring.com)



T-Molding



Threshold



Reducer



Flush Stairnose

Molding Specifications								
Profile	W1	W2	W3	T1	T2	T3	Length	Weight
-	Width	-	-	Height	-	-	-	Lbs
T-Molding	1-7/8"	1/2"	11/16"	5/8"	-	-	78"	2.7
Threshold	2"	27/32"	-	7/8"	1/2"	-	78"	2.7
Reducer	2"	-	-	19/32"	3/16"	-	78"	2.7
Flush Stairnose	3"	2-3/8"	-	13/16"	7/32"	5/8"	78"	5.5

Item Code				
Color	T-Molding	Threshold	Reducer	Flush Stairnose
Alimia	EWO15ATM	EWO15ATH	EWO15ARD	EWO15ASN
Bali	EWO15BTM	EWO15BTH	EWO15BRD	EWO15BSN
Caicos	EWO15CTM	EWO15CTH	EWO15CRD	EWO15CSN
Fiji	EWO15FTM	EWO15FTH	EWO15FRD	EWO15FSN
Hawea	EWO15HATM	EWO15HATH	EWO15HARD	EWO15HASN
Maui	EWO15MTM	EWO15MTH	EWO15MRD	EWO15MSN
Nevis	EWO15NTM	EWO15NTH	EWO15NRD	EWO15NSN
Oahu	EWO15OTM	EWO15OTH	EWO15ORD	EWO15OSN
Paxos	EWO15PATM	EWO15PATH	EWO15PARD	EWO15PASN
Rosario	EWO15RTM	EWO15RTH	EWO15RRD	EWO15RSN
Tahiti	EWO15TTM	EWO15TTH	EWO15TRD	EWO15TSN





The Pristine Collection includes Select Grade European White Oak with a combination of organic movement meeting inspired accents of undertone colors to capture the pure beauty of your space. Pristine features a 3mm premium sawn veneer that is 7-1/4" W x 9/16" thick and planks up to 74-3/4" RL.



**Cambria**  
PCWO14C7



**Hiawatha**  
PCWO14H7



**Lambert**  
PCWO14L7



**Monarch**  
PCWO14M7



**Portage**  
PCWO14P7




**Sonata**  
PCWO14S7


# FACT SHEET

Specifications	
Size	9/16" x 7-1/2" x RL up to 74-3/4"
Species	European White Oak
Finish	Polyurethane with Aluminum Oxide
Surface	Wirebrushed
Edge Treatment	Micro-Bevel
Face Veneer	Sawn Face
Color Variation	Low
Light Sensitivity	Low
Gloss Level	3-5 All Colors Except Hiawatha(5-7)
Certification	Lacey Act & Carb II Compliant
Installation *(on, above, or below grade)	Float, Glue Down, Nail
Milling	Tongue and Groove
Packaging	31.09 sq/ft per carton 1243.60 sq/ft per pallet 40 cartons per pallet
Warranty	Lifetime Residential Warranty 5 Year Light Commercial


\*See full warranty at [LWFlooring.com](http://LWFlooring.com)



T-Molding



Threshold



Reducer



Flush Stairnose

Molding Specifications								
Profile	W1	W2	W3	T1	T2	T3	Length	Weight
-	Width	-	-	Height	-	-	-	Lbs
T-Molding	1-7/8"	1/2"	11/16"	5/8"	-	-	78"	2.7
Threshold	2"	7/8"	-	7/8"	1/2"	-	78"	2.7
Reducer	2"	-	-	9/16"	3/16"	-	78"	1.7
Flush Stairnose	2-3/8"	1-4/5"	-	13/16"	1/4"	9/16"	78"	1.7

Item Code				
Color	T-Molding	Threshold	Reducer	Flush Stairnose
Cambria	PCWO14CTM	PCWO14CTH	PCWO14CRD	PCWO14CSN
Hiawatha	PCWO14HTM	PCWO14HTH	PCWO14HRD	PCWO14HSN
Lambert	PCWO14LTM	PCWO14LTH	PCWO14LRD	PCWO14LSN
Monarch	PCWO14MTM	PCWO14MTH	PCWO14MRD	PCWO14MSN
Portage	EWO14POTM	EWO14POTH	EWO14PORD	EWO14POSN
Sonata	PCWO14STM	PCWO14STH	PCWO14SRD	PCWO14SSN





The Vintage Elegance Collection features American Hickory & European White Oak that provides a rustic visual symphony of dramatic depth in a UV Urethane / UV Lacquer wire-brushed finish. Utilizing a 4mm sawn face veneer and planks that are 7-1/4" W x 5/8" thick and up to 74-3/4" in length Vintage Elegance excels in warmth and craftsmanship.



**Aspendale**  
VEAH15A7  
American Hickory



**Emilia**  
VEWO15E7  
European White Oak



**Kingsley**  
VEWO15K7  
European White Oak




**Mantua**  
VEWO15MA7  
European White Oak



**Norwich**  
VEWO15N7  
European White Oak



**Rosemont**  
VEWO15R7  
European White Oak

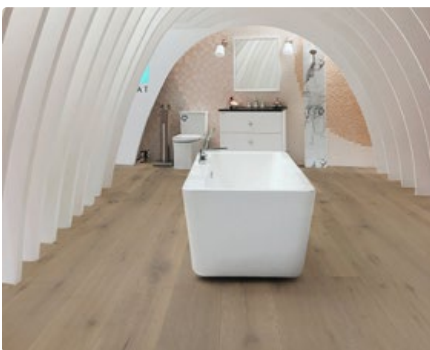


**Urbino**  
VEWO15U7  
European White Oak


# FACT SHEET

Specifications	
<b>Size</b>	5/8" x 7-1/2" x RL up to 74-3/4"
<b>Species</b>	European White Oak (Aspendale - American Hickory)
<b>Finish</b>	UV Urethane / UV Lacquer
<b>Surface</b>	Wirebrushed
<b>Edge Treatment</b>	Micro-Bevel
<b>Face Veneer</b>	Sawn Face
<b>Color Variation</b>	Medium/High
<b>Light Sensitivity</b>	Low
<b>Gloss Level</b>	7-13 (Aspendale <10) (Emilia 4-7) (Mantua 2-9)
<b>Certification</b>	Lacey Act & Carb II Compliant
<b>Installation</b> *(on, above, or below grade)	Glue Down, Nail
<b>Milling</b>	Tongue and Groove
<b>Packaging</b>	31.09 sq/ft per carton 1243.60 sq/ft per pallet 40 cartons per pallet
<b>Warranty</b>	Lifetime Residential Warranty 5 Year Light Commercial


\*See full warranty at [LWFlooring.com](http://LWFlooring.com)



T-Molding




Threshold



Reducer



Flush Stairnose



Quarter Round

Molding Specifications								
Profile	W1	W2	W3	T1	T2	T3	Length	Weight
-	Width	-	-	Height	-	-	-	Lbs
T-Molding	1-7/8"	1/2"	11/16"	5/8"	-	-	78"	2.7
Threshold	2"	7/8"	-	7/8"	1/2"	-	78"	2.7
Reducer	2"	-	-	5/8"	3/16"	-	78"	1.7
Flush Stairnose	3"	2-3/8"	-	13/16"	3/16"	5/8"	78"	1.7
Quarter Round	3/4"	-	-	3/4"	-	-	78"	1.7

Item Code					
Color	T-Molding	Threshold	Reducer	Flush Stairnose	Quarter Round
Aspendale	AH15ATM	AH15ATH	AH15ARD	AH15ASN	-
Emilia	EWO14EMTM	EWO14EMTH	VEWO15EMRD	VEWO15EMSN	-
Kingsley	RWO15KTM	RWO15KTH	RWO15KRD	RWO15KSN	RWO15KQR
Mantua	EWO14MATM	EWO14MATH	VEWO15MARD	VEWO15MASN	-
Norwich	VEWO15NTM	VEWO15NTH	VEWO15NRD	VEWO15NSN	-
Rosemont	RWO15RTM	RWO15RTH	RWO15RRD	RWO15RSN	RWO15RQR
Urbino	VEWO14URTM	VEWO14URTH	VEWO15URRD	VEWO15URSN	-





The Renaissance Collection, measuring 7-1/2" W x 9/16" thick with planks up to 74-3/4"L, offers a versatile and classic 3mm veneer in a European White Oak wire-brushed finish. Renaissance sets to inspire without sacrifice, utilizing timeless charm and authentic refusal of design limitation. Warm meets cool in this collection with undeniable sensory interest.



**Avelino**  
RCWO14AV7



**Capri**  
RCWO14C7



**Elba**  
RCWO14EL7



**Jenne**  
RCWO14J7



**Klausen**  
RCWO14KL7



**Lucca**  
RCWO14LU7



**Modena**  
RCWO14MO7



**Napoli**  
RCWO14NA7



**Palermo**  
RCWO14PA7



**Ravenna**  
RCWO14RA7




**Sorrento**  
RCWO14SO7


# FACT SHEET

Specifications	
<b>Size</b>	9/16" x 7-1/2" x RL up to 74-3/4" (Palermo RL 75-1/4")
<b>Species</b>	European White Oak
<b>Finish</b>	Polyurethane with Aluminum Oxide
<b>Surface</b>	Wirebrushed
<b>Edge Treatment</b>	Micro-Bevel
<b>Face Veneer</b>	Sawn Face Slice Face (Capri   Sorrento)
<b>Color Variation</b>	Medium/High
<b>Light Sensitivity</b>	Low/Med
<b>Gloss Level</b>	2-8 (Jenne & Palermo <8)
<b>Certification</b>	Lacey Act & Carb II Compliant
<b>Installation</b> *(on, above, or below grade)	Float, Glue Down, Nail
<b>Milling</b>	Tongue and Groove
<b>Packaging</b>	31.09 sq/ft per carton (Palermo 31.25) 1243.60 sq/ft per pallet (Palermo 1250) 40 cartons per pallet
<b>Warranty</b>	Lifetime Residential Warranty 5 Year Light Commercial

\*See full warranty at [LWFlooring.com](http://LWFlooring.com)




T-Molding



Threshold



Reducer



Flush Stairnose

Molding Specifications								
Profile	W1 Width	W2	W3	T1 Height	T2	T3	Length	Weight Lbs
T-Molding	1-7/8"	1/2"	11/16"	5/8"	-	-	78"	1.7
Threshold	2"	7/8"	-	7/8"	1/2"	-	78"	2.7
Reducer	2"	-	-	9/16"	3/16"	-	78"	1.7
Flush Stairnose	2-3/8"	1-4/5"	-	13/16"	1/4"	9/16"	78"	1.7

Item Code				
Color	T-Molding	Threshold	Reducer	Flush Stairnose
Avelino	RCWO14AVM	RCWO14AVH	RCWO14AVD	RCWO14AVN
Capri	RCWO14CTM	RCWO14CTH	RCWO14CRD	RCWO14CSN
Elba	RCWO14ELM	RCWO14ELH	RCWO14ELD	RCWO14ELN
Jenne	EWO14JTM	EWO14JTH	EWO14JRD	EWO14JSN
Klausen	RCWO14KLM	RCWO14KLH	RCWO14KLD	RCWO14KLN
Lucca	RCWO14LUM	RCWO14LUH	RCWO14LUD	RCWO14LUN
Modena	RCWO14MOM	RCWO14MOH	RCWO14MOD	RCWO14MON
Napoli	RCWO14NAM	RCWO14NAH	RCWO14NAD	RCWO14NAN
Palermo	EWO14PTM	EWO14PTH	EWO14PRD	EWO14PSN
Ravenna	RCWO14RAM	RCWO14RAH	RCWO14RAD	RCWO14RAN
Sorrento	RCWO14SOTM	RCWO14SOTH	RCWO14SORD	RCWO14SOSN





The Sonoma Valley Collection is LW's most diverse wood offering which includes Hickory, Walnut, and European Oak species in varying widths, groundbreaking movements, lively accents, and deep textures. This intriguing wood line features a 2mm veneer that goes from rustic to regal all in one stunning collection.



**Amarone**  
SV2AH12A37  
American Hickory



**Cabernet**  
SV2AH12C37  
American Hickory



**Grenache**  
SVAH12G37  
American Hickory



**Merlot**  
SV2AH12M37  
American Hickory



**Sherry**  
SV2AH12S37  
American Hickory



**Tokaji**  
SVAH12T7  
American Hickory



**Hermitage**  
SVAH12H7  
American Pecan



**Ives**  
SVAH12I7  
American Pecan



**Port**  
SVAW12P7  
American Walnut



**Brunello**  
SVWO12B7  
European White Oak



**Chardonnay**  
SVWO12C7P  
European White Oak



**Godello**  
SVWO12GO7  
European White Oak



**Madeira**  
SVWO12MA7P  
European White Oak



**Rossara**  
SVWO12RS7  
European White Oak



**Syrah**  
SVWO12S7  
European White Oak

# FACT SHEET


Specifications					
Color	Size	Sq/ft per Carton	Sq/ft per Pallet	Ctns. per Pallet	Light Sensitivity
Amarone	1/2" x 3" & 7-1/2" mixed x RL up to 74-3/4"	21.93	1491.24	68	Low
Brunello	1/2" x 7-1/2" x RL up to 75-1/4"	31.25	1406.25	45	Mid-Low
Cabernet	1/2" x 3" & 7-1/2" mixed x RL up to 74-3/4"	21.93	1491.24	68	Low
Chardonnay	1/2" x 7-1/2" x RL up to 75-1/4"	31.25	1406.25	45	Mid-Low
Godello	1/2" x 7-1/2" x 75-1/4" RL	31.25	1406.25	45	Mid-Low
Grenache	1/2" x 3" & 7-1/2" mixed x RL up to 74-3/4"	21.93	1,491.24	68	Low
Hermitage	1/2" x 7-1/2" x 82-5/8" RL	25.77	1,417.35	55	Low
Ives	1/2" x 7-1/2" x 82-5/8" RL	25.77	1,417.35	55	Low
Madeira	1/2" x 7-1/2" x RL up to 75-1/4"	31.25	1406.25	45	Mid-Low
Merlot	1/2" x 3" & 7-1/2" mixed x RL up to 74-3/4"	21.93	1491.24	68	Low
Port	1/2" x 7-1/2" x RL up to 72"	22.46	1347.60	60	Low
Rossara	1/2" x 7-1/2" x RL up to 74-3/4"	31.09	1399.05	45	Medium
Sherry	1/2" x 3" & 7-1/2" mixed x RL up to 74-3/4"	21.93	1491.24	68	Low
Syrah	1/2" x 7-1/2" x RL up to 75-1/4"	31.25	1406.25	45	Mid-Low
Tokaji	1/2" x 7-1/2" x RL up to 74-3/4"	23.32	1399.20	60	Medium

Color	Species	Gloss Level	Face Veneer	Color Variation	Surface
Amarone	American Hickory	6-10	Sawn Face	Medium	Wirebrushed & Handscraped
Brunello	European White Oak	≤8	Sliced Face	Medium	Wirebrushed
Cabernet	American Hickory	6-10	Sawn Face	Medium	Wirebrushed & Handscraped
Chardonnay	European White Oak	≤8	Sliced Face	Medium	Wirebrushed
Godello	European White Oak	≤8	Sliced Face	Medium	Wirebrushed
Grenache	American Hickory	6-10	Sliced Face	High	Wirebrushed & Handscraped
Hermitage	American Pecan	7±2	Sliced Face	Medium	Wirebrushed
Ives	American Pecan	7±2	Sliced Face	Medium	Wirebrushed
Madeira	European White Oak	≤8	Sliced Face	Medium	Wirebrushed
Merlot	American Hickory	6-10	Sawn Face	Medium	Wirebrushed & Handscraped
Port	American Walnut	6-10	Sliced Face	Medium	Wirebrushed
Rossara	European White Oak	5-8	Sliced Face	High	Wirebrushed
Sherry	American Hickory	6-10	Sawn Face	Medium	Wirebrushed & Handscraped
Syrah	European White Oak	≤8	Sliced Face	Medium	Wirebrushed
Tokaji	American Hickory	3-7	Sliced Face	High	Handscraped


<b>Finish</b>	Polyurethane with Aluminum Oxide
<b>Edge Treatment</b>	Micro-Bevel
<b>Certification</b>	Lacey Act & Carb II Compliant
<b>Installation</b> *(on, above, or below grade)	Float, Glue Down, Nail
<b>Milling</b>	Tongue and Groove
<b>Warranty</b>	Lifetime Residential Warranty 5 Year Light Commercial

\*See full warranty at [LWFlooring.com](http://LWFlooring.com)








T-Molding



Threshold



Reducer


 Flush  
Stairnose

 Quarter  
Round

**Molding Specifications**

Profile	W1 Width	W2	W3	T1 Height	T2	T3	Length	Weight Lbs
T-Molding	1-7/8"	1/2"	11/16"	5/8"	-	-	78"	1.7 - 2.7
Threshold	2"	7/8"	-	3/4"	3/8"	-	78"	1.7 - 2.7
Reducer	2"	-	-	1/2"	1/8"	-	78"	1.7 - 2.7
Flush Stairnose	3"	1-4/5"	-	3/4"	1/4"	1/2"	78"	2.7
Quarter Round	3/4"	-	-	3/4"	-	-	78"	1.7

**Item Code**

Color	T-Molding	Threshold	Reducer	Flush Stairnose	Quarter Round
Amarone	AH12ATM	AH12ATH	AH12ARD	AH12ASN	-
Brunello	SVWO12BRTM	SVWO12BRTH	SVWO12BRRD	SVWO12BRSN	-
Cabernet	AH12CATM	AH12CATH	AH12CARD	AH12CASN	AH12CAQR
Chardonnay	EWO12CHTM	EWO12CHTH	EWO12CHRD	EWO12CHSN	EWOMQR
Godello	SVWO12GOTM	SVWO12GOTH	SVWO12GORD	SVWO12GOSN	-
Grenache	SVWO12GRTM	SVWO12GRTH	SVWO12GRRD	SVWO12GRSN	RWO15RQR
Hermitage	AH12HTM	AH12HTH	AH12HRD	AH12HSN	-
Ives	AH12ITM	AH12ITH	AH12IRD	AH12ISN	-
Madeira	EWO14VTM	EWO12MDTH	EWO12MDRD	EWO12MDSN	EWOVQR
Merlot	AH12METM	AH12METH	AH12MERD	AH12MESN	AH12MEQR
Port	AW12NTM	AW12NTH	AW12NRD	AW12NSN	-
Rossara	SVWO12ROTM	SVWO12ROTH	SVWO12RORD	SVWO12ROSN	-
Sherry	AH12SHTM	AH12SHTH	AH12SHRD	AH12SHSN	AH12SHQR
Syrah	SVWO12SYTM	SVWO12SYTH	SVWO12SYRD	SVWO12SYSN	-
Tokaji	AH12TTM	AH12TTH	AH12TRD	AH12TSN	AH12TQR



Our French Impressions Collection features European White Oak veneers that are on planks 7" W x 3/8" thick and lengths up to 71" in size. Offered in today's most sought after design colors, French Impressions showcases a gentle wire-brushed finish that values simplicity over excess. This collection is a striking canvas of modern beauty for your home for years to come.



**Andrique**  
FIWO10AN7



**Bazille**  
FIWO10BA7



**Cezanne**  
FIWO10C7



**Degas**  
FIWO10D7



**Gauguin**  
FIWO10GA7



**Luna**  
FIWO10L7



**Monet**  
FIWO10M7



**Ottin**  
FIWO10OT7



**Pissarro**  
FIWO10P7



**Renoir**  
FIWO10R7



**Signac**  
FIWO10S7




**Van Gogh**  
FIWO10V7


# FACT SHEET

Specifications	
Size	3/8" x 7" x RL up to 71"
Species	European White Oak
Finish	Polyurethane with Aluminum Oxide
Surface	Wirebrushed
Edge Treatment	Micro-Bevel
Face Veneer	Slice Face
Color Variation	Low - Degas Medium - Cezanne, Monet, Renoir, Signac High - Andrique, Bazille, Gauguin, Luna, Ottin, Pissaro, Van Gogh
Light Sensitivity	Low
Gloss Level	5-8
Certification	Lacey Act & Carb II Compliant
Installation *(on, above, or below grade)	Glue Down, Nail
Milling	Tongue and Groove
Packaging	34.49 sq/ft per carton 1552.05 sq/ft per pallet (Palermo 1250) 45 cartons per pallet
Warranty	Lifetime Residential Warranty 5 Year Light Commercial


\*See full warranty at [LWFFlooring.com](http://LWFFlooring.com)



T-Molding



Threshold



Reducer


 Flush  
Stairnose

Molding Specifications								
Profile	W1 Width	W2	W3	T1 Height	T2	T3	Length	Weight Lbs
T-Molding	1-7/8"	1/2"	11/16"	5/8"	-	-	78"	1.7
Threshold	2"	7/8"	-	3/4"	1/2"	-	78"	1.7
Reducer	1-9/16"	-	-	3/8"	1/8"	-	78"	1.7
Flush Stairnose	2-3/8"	1-7/8"	-	13/16"	7/16"	3/8"	78"	1.7

Item Code				
Color	T-Molding	Threshold	Reducer	Flush Stairnose
Andrique	FIWO10ANTM	FIWO10ANTH	FIWO10ANRD	FIWO10ANSN
Bazille	FIWO10BATM	FIWO10BATH	FIWO10BARD	FIWO10BASN
Cezanne	FIWO10CTM	FIWO10CTH	FIWO10CRD	FIWO10CSN
Degas	FIWO10DTM	FIWO10DTH	FIWO10DRD	FIWO10DSN
Gauguin	FIWO10GATM	FIWO10GATH	FIWO10GARD	FIWO10GASN
Luna	FIWO10LTM	FIWO10LTH	FIWO10LRD	FIWO10LSN
Monet	FIWO10MTM	FIWO10MTH	FIWO10MRD	FIWO10MSN
Ottin	FIWO10OTTM	FIWO10OTTH	FIWO10OTRD	FIWO10OTSN
Pissarro	FIWO10PTM	FIWO10PTH	FIWO10PRD	FIWO10PSN
Renoir	FIWO10RTM	FIWO10RTH	FIWO10RRD	FIWO10RSN
Signac	FIWO10STM	FIWO10STH	FIWO10SRD	FIWO10SSN
Van Gogh	FIWO10VTM	FIWO10VTH	FIWO10VRD	FIWO10VSN






The Traditions Collection is a nostalgic line-up of handscraped and smooth finished Acacia, American Hickory and European White Oak wood species. Unmistakably rich in color and texture, Traditions is full of character with a heritage of style giving each floor its own distinct personality.



**Dawn**  
HSAC10D5



**Moonlight**  
HSAC10M5



**Natural Acacia**  
HSAC10N5



**Autumn Brown**  
HSAH12AB5



**Bronze**  
HSAH10B5



**Caramel Cream**  
TCAH12CC7



**Chestnut**  
HSAH10C5



**Honey Mango**  
TCAH12HM7



**Java**  
HSAH10J5



**Toasted Almond**  
TCAH12TA7



**Toffee**  
HSAH10T5



**Wild Blackberry**  
TCAH12WB7



**Latte**  
TCWO10L5



**Praline**  
TCWO10P5



**Riviera**  
TCWO10R5


# FACT SHEET

Specifications					
Color	Size	Sq/ft per Carton	Sq/ft per Pallet	Ctns. per Pallet	Installation
Autumn Brown	1/2" x 5" x RL up to 47-1/4"	32.80	1049.60	32	Float, Glue, Nail
Bronze	3/8" x 5" x RL up to 47-1/4"	32.80	1049.60	32	Glue, Nail
Caramel Cream	1/2" x 6-1/2" x RL up to 74-4/5"	33.94	1,425.48	42	Float, Glue, Nail
Chestnut	3/8" x 5" x RL up to 47-1/4"	32.80	1049.60	32	Glue, Nail
Dawn	3/8" x 5" x RL up to 47-1/4"	34.45	1653.60	48	Glue, Nail
Honey Mango	1/2" x 6-1/2" x RL up to 74-4/5"	33.94	1,425.48	42	Float, Glue, Nail
Java	3/8" x 5" x RL up to 47-1/4"	32.80	1049.60	32	Glue, Nail
Latte	3/8" x 5" x RL up to 70-7/8"	34.45	1653.60	48	Float, Glue, Nail
Moonlight	3/8" x 5" x RL up to 47-1/4"	34.45	1653.60	48	Glue, Nail
Natural Acacia	3/8" x 5" x RL up to 47-1/4"	34.45	1653.60	48	Glue, Nail
Praline	3/8" x 5" x RL up to 70-7/8"	34.45	1653.60	48	Float, Glue, Nail
Riviera	3/8" x 5" x RL up to 70-7/8"	34.45	1653.60	48	Float, Glue, Nail
Toasted Almond	1/2" x 6-1/2" x RL up to 74-4/5"	33.94	1,425.48	42	Float, Glue, Nail
Toffee	3/8" x 5" x RL up to 47-1/4"	32.80	1049.60	32	Glue, Nail
Wild Blackberry	1/2" x 6-1/2" x RL up to 74-4/5"	33.94	1,425.48	42	Float, Glue, Nail


Color	Species	Gloss Level	Face Veneer	Color Variation	Edge Treatment
Autumn Brown	American Hickory	9-15	Rotary	Medium	Micro-Bevel
Bronze	American Hickory	10-15	Rotary	Medium	Micro-Bevel
Caramel Cream	American Hickory	10-15	Slice Face	Medium	Beveled
Chestnut	American Hickory	10-15	Rotary	Medium	Micro-Bevel
Dawn	Acacia	15-20	Slice Face	Medium	Micro-Bevel
Honey Mango	American Hickory	10-15	Slice Face	High	Beveled
Java	American Hickory	10-15	Rotary	Medium	Micro-Bevel
Latte	European White Oak	5-8	Slice Face	Low	Micro-Bevel
Moonlight	Acacia	15-20	Slice Face	Medium	Micro-Bevel
Natural Acacia	Acacia	15-20	Slice Face	High	Micro-Bevel
Praline	European White Oak	5-8	Slice Face	Low	Micro-Bevel
Riviera	European White Oak	5-8	Slice Face	Low	Micro-Bevel
Toasted Almond	American Hickory	10-15	Slice Face	Medium	Beveled
Toffee	American Hickory	9-15	Rotary	Medium	Micro-Bevel
Wild Blackberry	American Hickory	10-15	Slice Face	Low	Beveled

<b>Finish</b>	Polyurethane with Aluminum Oxide
<b>Surface</b>	Handscraped
<b>Certification</b>	Lacey Act & Carb II Compliant
<b>Light Sensitivity</b>	Low
<b>Milling</b>	Tongue and Groove
<b>Warranty</b>	Lifetime Residential Warranty 5 Year Light Commercial
*See full warranty at <a href="http://LWFlooring.com">LWFlooring.com</a>	







T-Molding							
Color	Item Code	W1	T1	W2	W3	Length	Weight
-	-	Width	Height	-	-	-	Lbs
Autumn Brown	AH12ABTM	1-7/8"	5/8"	1/2"	11/16"	78"	1.7
Bronze	AH10BTM	1-7/8"	5/8"	1/2"	11/16"	78"	1.7
Caramel Cream	AH12CCTM	1-7/8"	5/8"	1/2"	11/16"	78"	1.7
Chestnut	AH10CTM	1-7/8"	5/8"	1/2"	11/16"	78"	1.7
Dawn	AC10DTM	1-3/4"	1/2"	1/2"	5/8"	72"	1.7
Honey Mango	AH12HMTM	1-7/8"	5/8"	1/2"	11/16"	78"	1.7
Java	AH10JTM	1-7/8"	5/8"	1/2"	11/16"	78"	1.7
Latte	TCWO10LTM	1-7/8"	5/8"	1/2"	11/16"	78"	1.7
Moonlight	AC10MTM	1-3/4"	1/2"	1/2"	5/8"	72"	1.7
Acacia Natural	AC10NTM	1-3/4"	1/2"	1/2"	5/8"	72"	1.7
Praline	TCWO10PTM	1-7/8"	5/8"	1/2"	11/16"	78"	1.7
Riviera	TCWO10RTM	1-7/8"	5/8"	1/2"	11/16"	78"	1.7
Toasted Almond	AH12TATM	1-7/8"	5/8"	1/2"	11/16"	78"	1.7
Toffee	AH10TTM	1-7/8"	5/8"	1/2"	11/16"	78"	1.7
Wild Blackberry	AH12WBTM	1-7/8"	5/8"	1/2"	11/16"	78"	1.7




Threshold							
Color	Item Code	W1	T1	W2	T2	Length	Weight
-	-	Width	Height	-	-	-	Lbs
Autumn Brown	AH12ABTH	2"	3/4"	7/8"	3/8"	78"	2.7
Bronze	AH10BTH	2"	3/4"	7/8"	3/8"	78"	2.7
Caramel Cream	AH12CCTH	2"	3/4"	7/8"	3/8"	78"	1.7
Chestnut	AH10CTH	2"	3/4"	7/8"	3/8"	78"	2.7
Dawn	AC10DTH	1-3/4"	3/4"	11/16"	3/8"	72"	2.7
Honey Mango	AH12HMTH	2"	3/4"	7/8"	3/8"	78"	1.7
Java	AH10JTH	2"	3/4"	7/8"	3/8"	78"	2.7
Latte	TCWO10LTH	2"	3/4"	7/8"	3/8"	78"	1.7
Moonlight	AC10MTH	1-3/4"	3/4"	11/16"	3/8"	72"	2.7
Acacia Natural	AC10NTH	1-3/4"	3/4"	11/16"	3/8"	72"	2.7
Praline	TCWO10PTH	2"	3/4"	7/8"	3/8"	78"	1.7
Riviera	TCWO10RTH	2"	3/4"	7/8"	3/8"	78"	1.7
Toasted Almond	AH12TATH	2"	3/4"	7/8"	3/8"	78"	1.7
Toffee	AH10TTH	2"	3/4"	7/8"	3/8"	78"	2.7
Wild Blackberry	AH12WBTH	2"	3/4"	7/8"	3/8"	78"	1.7


**Reducer**

Color	Item Code	W1 Width	T1 Height	T2	Length	Weight Lbs
Autumn Brown	AH12ABRD	2"	1/2"	1/8"	78"	1.7
Bronze	AH10BRD	1-9/16"	3/8"	1/8"	78"	1.7
Caramel Cream	AH12CCRD	2"	1/2"	1/8"	78"	1.7
Chestnut	AH10CRD	1-9/16"	3/8"	1/8"	78"	1.7
Dawn	AC10DRD	1-3/4"	3/8"	1/8"	72"	1.7
Honey Mango	AH12HMRD	2"	1/2"	1/8"	78"	1.7
Java	AH10JRD	1-9/16"	3/8"	1/8"	78"	1.7
Latte	TCWO10LRD	1-1/2"	3/8"	1/8"	78"	1.7
Moonlight	AC10MRD	1-3/4"	3/8"	1/8"	72"	1.7
Acacia Natural	AC10NRD	1-3/4"	3/8"	1/8"	72"	1.7
Praline	TCWO10PRD	1-1/2"	3/8"	1/8"	78"	1.7
Riviera	TCWO10RRD	1-1/2"	3/8"	1/8"	78"	1.7
Toasted Almond	AH12TARD	2"	1/2"	1/8"	78"	1.7
Toffee	AH10TRD	1-9/16"	3/8"	1/8"	78"	1.7
Wild Blackberry	AH12WBRD	2"	1/2"	1/8"	78"	1.7


**Flush Stairnose**

Color	Item Code	W1 Width	W2	T1 Height	T2	T3	Length	Weight Lbs
Autumn Brown	AH12ABSN	3"	1-4/5"	3/4"	1/4"	1/2"	78"	2.7
Bronze	AH10BSN	2-3/8"	1-7/8"	13/16"	7/16"	3/8"	78"	2.7
Caramel Cream	AH12CCSN	3"	1-4/5"	3/4"	1/4"	1/2"	78"	1.7
Chestnut	AH10CSN	2-3/8"	1-7/8"	13/16"	7/16"	3/8"	78"	2.7
Dawn	AC10DSN	3-1/2"	1-7/8"	3/4"	5/16"	3/8"	72"	2.7
Honey Mango	AH12HMSN	3"	1-4/5"	3/4"	1/4"	1/2"	78"	1.7
Java	AH10JSN	2-3/8"	1-7/8"	13/16"	7/16"	3/8"	78"	2.7
Latte	TCWO10LSN	2-3/8"	1-7/8"	13/16"	7/16"	3/8"	78"	1.7
Moonlight	AC10MSN	3-1/2"	1-7/8"	3/4"	5/16"	3/8"	72"	2.7
Acacia Natural	AC10NSN	3-1/2"	1-7/8"	3/4"	5/16"	3/8"	72"	2.7
Praline	TCWO10PSN	2-3/8"	1-7/8"	13/16"	7/16"	3/8"	78"	1.7
Riviera	TCWO10RSN	2-3/8"	1-7/8"	13/16"	7/16"	3/8"	78"	1.7
Toasted Almond	AH12TASN	3"	1-4/5"	3/4"	1/4"	1/2"	78"	1.7
Toffee	AH10TSN	2-3/8"	1-7/8"	13/16"	7/16"	3/8"	78"	2.7
Wild Blackberry	AH12WBSN	3"	1-4/5"	3/4"	1/4"	1/2"	78"	1.7


**Quarter Round**

Color	Item Code	W1 Width	T1 Height	Length	Weight Lbs
Autumn Brown	AHABQR	3/4"	3/4"	78"	1.7
Bronze	AHBQR	3/4"	3/4"	78"	1.7
Caramel Cream	AH12CCQR	3/4"	3/4"	78"	1.7
Chestnut	AH10CQR	3/4"	3/4"	78"	1.7
Dawn	ACGTQR	3/4"	3/4"	78"	1.7
Honey Mango	AHNQR	3/4"	3/4"	78"	1.7
Java	AH10JQR	3/4"	3/4"	78"	1.7
Moonlight	ACNHQR	3/4"	3/4"	78"	1.7
Acacia Natural	ACNQR	3/4"	3/4"	78"	1.7
Toasted Almond	AH12TAQR	3/4"	3/4"	78"	1.7
Toffee	AH12SHQR	3/4"	3/4"	78"	1.7
Wild Blackberry	AH12WBQR	3/4"	3/4"	78"	1.7



# WATERPROOF FLOORING



LW Flooring is proud to present our full line of waterproof flooring which are not only durable and pet friendly, but also inspire your creativity and imagination.

**SAPPHIRE WAVE**  
RIVERSTONE COLLECTION | SPC5SW7



Featuring stunning Embossed In Register detailing and a resilient 30-mil wear layer on substantial 9" x 72" planks, this collection captures a high-end, seamless look and feel that embodies strength, scale and sophistication.




**Cannon Beach**  
GC12CB9



**Del Mar**  
GC12DM9




**Eastport**  
GC12EA9

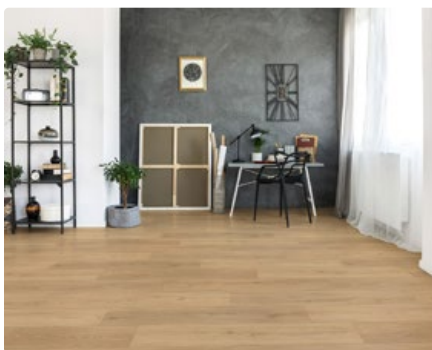

**Friday Harbor**  
GC12FH9




**Gold Coast**  
GC12GC9

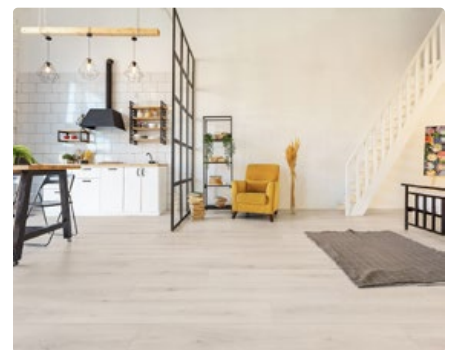

**Half Moon Bay**  
GC12HM9



**Port Royal**  
GC12PR9

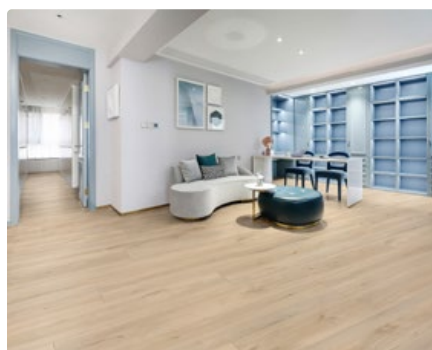


**Sanibel**  
GC12SA9


# FACT SHEET

Specifications	
Size	12mm x 9" x 72"
Wear Layer	30 mil
Finish	Polyurethane
Surface	Embossed in Register
Edge Treatment	Painted Beveled
Attached Cushion	Yes
Color Variation	Medium
Light Sensitivity	Low
Installation *(on, above, or below grade)	5G Locking System
Milling	Tongue and Groove
Packaging	17.73 sq/ft per carton 1,063.80 sq/ft per pallet 60 cartons per pallet
Warranty	Lifetime Residential Warranty 15 Year Light Commercial

\*See full warranty at [LWFlooring.com](http://LWFlooring.com)




T-Molding




Threshold




Reducer



Flush Stairnose



Multi Stairnose



Stair Tread Round Nose

Molding Specifications								
Profile	W1	W2	W3	T1	T2	T3	Length	Weight
-	Width	-	-	Height	-	-	-	Lbs
T-Molding	1-3/4"	3/8"	11/16"	9/16"	-	-	92"	1.39
Threshold	1-3/8"	3/8"	-	9/16"	7/16"	-	92"	1.59
Reducer	1-3/4"	-	-	9/16"	7/16"	-	92"	1.76
Flush Stairnose	4-7/16"	3-13/16"	-	1"	9/16"	12mm	92"	5.7
Multi Stairnose	2"	-	-	1"	-	1/16"	92"	5.7
Stair Tread Round Nose	12"	-	-	1-3/16"	7/8"	5/16"	47-1/4"	7.28

Item Code						
Color	T-Molding	Threshold	Reducer	Flush Stairnose	Multi Stairnose	Stair Tread Round Nose
Cannon Beach	GC12CBTM	GC12CBTH	GC12CBRD	GC12CBSN	GC12CBMSN	GC12CBSTR
Del Mar	GC12DMTM	GC12DMTH	GC12DMRD	GC12DMSN	GC12DMMSN	GC12DMSTR
Eastport	GC12EATM	GC12EATH	GC12EARD	GC12EASN	GC12EAMSN	GC12EASTR
Friday Harbor	GC12FHTM	GC12FHTH	GC12FHRD	GC12FHSN	GC12FHMSN	GC12FHSTR
Gold Coast	GC12GCTM	GC12GCTH	GC12GCRD	GC12GCSN	GC12GCMSN	GC12GCSTR
Half Moon Bay	GC12HMTM	GC12HMTH	GC12HMRD	GC12HMSN	GC12HMMSN	GC12HMSTR
Port Royal	GC12PRTM	GC12PRTH	GC12PRRD	GC12PRSN	GC12PRMSN	GC12PRSTR
Sanibel	GC12SATM	GC12SATH	GC12SARD	GC12SASN	GC12SAMSN	GC12SASTR





The Riverside Collection combines the durability of vinyl with the beauty of today's contemporary and rustic hardwood floor visuals. Completely waterproof, low-maintenance, pet friendly, scratch & dent resistant, and long lasting this highly durable 20 mil wear layer LVP performs day-in and day-out all while maintaining its incredible look and feel. Easy to install and the performance you expect in LVP, Riverside is the right combination that everyday life demands in a flooring solution.



**Anise**  
EVP7AN9



**Buttercup**  
EVP7BU9



**Cattail**  
EVP7CA9



**Chamomile**  
EVP7CH9



**Foxglove**  
EVP7FO9



**Goldenrod**  
EVP7GO9



**Marigold**  
EVP7MA9



**Orchid**  
EVP7OR9



**Papyrus**  
EVP7PP9



**Primrose**  
EVP7PR9



**Wisteria**  
EVP7WS9



**Zinnia**  
EVP7ZI9


# FACT SHEET

Testing		
Critical Radiant Flux	ASTM E648	Class I
Surface Flammability	DOC FF 1-70	Passed
Coefficient of Friction	ASTM 2047	Passed >0.6
Static Load Limit	ASTM F970	Exceeds 3000 lbs (No cushion)
STC Sound Testing*	ASTM E492	71
IIC Sound Testing*	ASTM E989	73
*Sound testing will vary depending upon floor/ceiling assembly		
Floor Score Certified		
Phthalate Free		
PVC		100% Virgin PVC


Size & Packaging Per Color				
Color	Size	Pcs. per Carton	Sq/ft per Carton	Ctns. per Pallet
Anise	7.8mm x 9" x 59"	8 pcs (50.19 lbs)	29.27	52
Buttercup	7.8mm x 9" x 59"	8 pcs (50.59 lbs)	29.27	52
Cattail	7.8mm x 9-3/8" x 60"	8 pcs (52.01 lbs)	31.19	52
Chamomile	7.8mm x 9" x 59"	8 pcs (50.59 lbs)	29.27	52
Foxglove	7.8mm x 9" x 59"	8 pcs (50.59 lbs)	29.27	52
Goldenrod	8.0mm x 9" x 70"	6 pcs (46.29 lbs)	26.51	52
Marigold	7.8mm x 9" x 59"	8 pcs (49.81 lbs)	29.27	52
Orchid	8.0mm x 9" x 70"	6 pcs (46.29 lbs)	26.51	52
Papyrus	7.8mm x 9" x 59"	8 pcs (50.19 lbs)	29.27	52
Primrose	8.0mm x 9" x 70"	6 pcs (46.29 lbs)	26.51	52
Wisteria	7.8mm x 9-3/8" x 60"	8 pcs (52.01 lbs)	31.19	52
Zinnia	7.8mm x 9" x 59"	8 pcs (50.19 lbs)	29.27	52

Specifications	
<b>Wear Layer</b>	20 mil
<b>Finish</b>	Polyurethane
<b>Surface</b>	Embossed in Register
<b>Edge Treatment</b>	Four-Side Painted Bevel
<b>Attached Cushion</b>	1.5mm Cork Backing
<b>Installation</b> *(on, above, or below grade)	Drop Lock, Click Floating Floor
<b>Warranty</b>	Lifetime Waterproof Lifetime Residential Wear 15 Year Light Commercial
*See full warranty at <a href="http://LWFlooring.com">LWFlooring.com</a>	






T-Molding




Threshold




Reducer



Flush Stairnose



Overlap Stairnose



Stair Tread Round Nose

**Molding Specifications**

Profile	W1	W2	W3	T1	T2	T3	Length	Weight
-	Width	-	-	Height	-	-	-	Lbs
T-Molding	1-3/4"	3/8"	11/16"	3/8"	-	-	92"	2.7
Threshold	1-3/8"	3/8"	-	3/8"	1/4"	-	92"	2.7
Reducer	1-3/4"	-	-	3/8"	5/16"	-	92"	2.7
Flush Stairnose	4-5/16"	3-13/16"	-	1"	11/16"	7.8 - 8mm	92"	2.7
Overlap Stairnose	2-1/16"	-	-	11/16"	-	5/16"	92"	5.7
Stair Tread Round Nose	12"	-	-	1-1/5"	7/8"	5/16"	47-1/4"	7.17

**Item Code**

Color	T-Molding	Threshold	Reducer	Flush Stairnose	Overlap Stairnose	Stair Tread Round Nose
Anise	EVP7ANTM	EVP7ANTH	EVP7ANRD	EVP7ANSNF	EVP7ANSNO	EVP7ANSTR
Buttercup	EVP7BUTM	EVP7BUTH	EVP7BURD	EVP7BUSN	EVP7BUSNO	EVP7BUSTR
Cattail	EVP7CATM	EVP7CATH	EVP7CARD	EVP7CASN	EVP7CASNO	EVP7CASTR
Chamomile	EVP7CHTM	EVP7CHTH	EVP7CHRD	EVP7CHSN	EVP7CHSNO	EVP7CHSTR
Foxglove	EVP7FOTM	EVP7FOTH	EVP7FORD	EVP7FOSN	EVP7FOSNO	EVP7FOSTR
Goldenrod	EVP7GOTM	EVP7GOTH	EVP7GORD	EVP7GOSN	EVP7GOSNO	EVP7GOSTR
Marigold	EVP7MATM	EVP7MATH	EVP7MARD	EVP7MASN	EVP7MASNO	EVP7MASTR
Orchid	EVP7ORTM	EVP7ORTH	EVP7ORRD	EVP7ORSN	EVP7ORSNO	EVP7ORSTR
Papyrus	EVP7PPPTM	EVP7PPPTH	EVP7PPRD	EVP7PPSNF	EVP7PPSNO	EVP7PPSTR
Primrose	EVP7PRTM	EVP7PRTH	EVP7PRRD	EVP7PRSNF	EVP7PRSNO	EVP7PRSTR
Wisteria	EVP7WSTM	EVP7WSTH	EVP7WSRD	EVP7WSSNF	EVP7WSSNO	EVP7WSSTR
Zinnia	EVP7ZITM	EVP7ZITH	EVP7ZIRD	EVP7ZISN	EVP7ZISNO	EVP7ZISTR



The Riverstone RCV Collection features a 20 mil wear layer, 5.5 mm overall thickness, 100% virgin PVC construction, eco-friendly, low maintenance, long-lasting, waterproof, pet friendly option in vinyl flooring. Stunning Embossed-In-Register (EIR) wood aesthetics, a rich distinct color palette, true-to-life textures all combine to bring the look and feel of nature indoors. Riverstone represents both the luxury and craftsmanship you expect in a Rigid Core Vinyl (RCV) floor.



**Amber Tide**  
SPC5AT7



**Amethyst Cove**  
SPC5AC7



**Citrine Oasis**  
SPC5CO7



**Garnet Bay**  
SPC5GB7



**Havana**  
SPC5HA7



**Moonstone Creek**  
SPC5MC7



**Navajo**  
SPC5NA7



**Peridot Drift**  
SPC5PD7



**Ruby Splash**  
SPC5RS7K



**Sapphire Wave**  
SPC5SW7



**Topaz Lagoon**  
SPC5TL7




**Vista**  
SPC5VT7

# FACT SHEET


Testing		
Critical Radiant Flux	ASTM E648	Class I
Surface Flammability	DOC FF 1-70	Passed
Coefficient of Friction	ASTM 2047	Passed >0.6
Static Load Limit	ASTM F970	Exceeds 3000 lbs (No cushion)
STC Sound Testing*	ASTM E492	68
IIC Sound Testing*	ASTM E989	70
*Sound testing will vary depending upon floor/ceiling assembly		
Floor Score Certified		
Phthalate Free		
PVC		100% Virgin PVC

Specifications	
<b>Size</b>	5.5mm x 7" x 60" 5.5mm x 7" x 48" (Amethyst Cove & Moonstone Creek)
<b>Wear Layer</b>	20 mil
<b>Finish</b>	Polyurethane
<b>Surface</b>	Embossed in Register
<b>Edge Treatment</b>	Four-Side Painted Bevel
<b>Attached Cushion</b>	1.5mm EVA Backing
<b>Installation</b> *(on, above, or below grade)	Click Lock, Click Floating Floor
<b>Packaging</b>	23.32 - 23.37 sq/ft per carton 1,399.2 - 1,515.8 sq/ft per pallet 60 - 65 cartons per pallet
<b>Warranty</b>	Lifetime Waterproof Lifetime Residential Wear 15 Year Light Commercial
*See full warranty at <a href="http://LWFlooring.com">LWFlooring.com</a>	






T-Molding



Threshold



Reducer




Flush Stairnose



Overlap Stairnose



Stair Tread Round Nose



Stair Tread Square Nose

**Molding Specifications**

Profile	W1 Width	W2	W3	W5	T1 Height	T2	T3	Length	Weight Lbs
T-Molding	1-3/4"	3/8"	11/16"	-	3/8"	-	-	92"	2.7
Threshold	1-3/8"	3/8"	-	-	3/8"	1/4"	-	92"	2.7
Reducer	1-3/4"	-	-	-	3/8"	5/16"	-	92"	2.7
Flush Stairnose	4-5/16"	3-13/16"	-	-	1"	11/16"	7.8 - 8mm	92"	2.7
Overlap Stairnose	2-1/16"	-	-	-	11/16"	-	5/16"	92"	5.7
Stair Tread Round Nose	12"	-	-	-	1-1/5"	7/8"	5/16"	47-1/4"	7.17
Stair Tread Square Nose	11-13/16"	-	-	1/2"	1-1/2"	-	1/4"	48"	12.5

**Item Code**

Color	T-Molding	Threshold	Reducer	Flush Stairnose	Overlap Stairnose	Stair Tread Round Nose	Stair Tread Square Nose
Amber Tide	SPC5ATTM	SPC5ATTH	SPC5ATRD	SPC5ATSNF	SPC5ATSNO	SPC5ATSTR	-
Amethyst Cove	SPC5ACTM	SPC5ACTH	SPC5ACRD	SPC5ACSNF	SPC5ACSNO	SPC5ACSTR	SPC5ACST
Citrine Oasis	SPC5COTM	SPC5COTH	SPC5CORD	SPC5COSNF	SPC5COSNO	SPC5COSTR	-
Garnet Bay	SPC5GBTM	SPC5GBTH	SPC5GBRD	SPC5GBSNF	SPC5GBSNO	SPC5GBSTR	SPC5GBST
Havana	SPC5HATM	SPC5HATH	SPC5HARD	SPC5HASNF	SPC5HASNO	SPC5HASTR	-
Moonstone Creek	SPC5MCTM	SPC5MCTH	SPC5MCRD	SPC5MCSNF	SPC5MCSNO	SPC5MCSTR	SPC5MCST
Navajo	SPC5NATM	SPC5NATH	SPC5NARD	SPC5NASNF	SPC5NASNO	SPC5NASTR	-
Peridot Drift	SPC5PDTM	SPC5PDTH	SPC5PDRD	SPC5PDSNF	SPC5PDSNO	SPC5PDSTR	SPC5PDST
Ruby Splash	SPC5RSTM	SPC5RSTH	SPC5RSRD	SPC5RSSNF	SPC5RSSNO	SPC5RSSTR	SPC5RSST
Sapphire Wave	SPC5SWTM	SPC5SWTH	SPC5SWRD	SPC5WSNF	SPC5WSNO	SPC5SWSTR	SPC5SWST
Topaz Lagoon	SPC5TLTM	SPC5TLTH	SPC5TLRD	SPC5TLSNF	SPC5TLSNO	SPC5TLSTR	-
Vista	SPC5VTM	SPC5VTTH	SPC5VTRD	SPC5VTSNF	SPC5VTSNO	SPC5VTSTR	-



The Lakeview RCV Collection gives you everything you need in real hardwood looks and natural colors all with the durability and performance of a true rigid core vinyl floor. Featuring a 20 mil wear layer, the latest in sought-after hardwood visuals and designer style colors, this Embossed RCV is waterproof, pet friendly, low maintenance, FloorScore Certified, and sensible all while continuing to bring the look and feel of timeless hardwood to any space in your home.



**Bayfield**  
SPC4BA7



**Breaux Bridge**  
SPC4BB7



**Champlain**  
SPC4CP7



**Hartwell**  
SPC4HA7



**Lochloosa**  
SPC4LL7



**Mackinac Island**  
SPC4MI7



**Marble Falls**  
SPC4MF7



**Sandpoint**  
SPC4SP7



**Victoria**  
SPC4VI7




**Yellowstone**  
SPC4YS7

# FACT SHEET

Testing		
Critical Radiant Flux	ASTM E648	Class I
Surface Flammability	DOC FF 1-70	Passed
Coefficient of Friction	ASTM 2047	Passed >0.6
Static Load Limit	ASTM F970	Exceeds 3000 lbs (No cushion)
STC Sound Testing*	ASTM E492	71
IIC Sound Testing*	ASTM E989	71
*Sound testing will vary depending upon floor/ceiling assembly		
Floor Score Certified		
Phthalate Free		
PVC		100% Virgin PVC

Specifications	
<b>Size</b>	5.0mm x 7" x 48" Nominal
<b>Wear Layer</b>	20 mil
<b>Finish</b>	Polyurethane
<b>Surface</b>	Embossed
<b>Edge Treatment</b>	Four-Side Micro Bevel
<b>Attached Cushion</b>	1.0mm EVA Backing
<b>Installation</b> *(on, above, or below grade)	Click Lock, Click Floating Floor
<b>Packaging</b>	23.67 sq/ft per carton 1,420.20 sq/ft per pallet 60 cartons per pallet
<b>Warranty</b>	Lifetime Waterproof Lifetime Residential Wear 15 Year Light Commercial Wear
*See full warranty at <a href="http://LWFlooring.com">LWFlooring.com</a>	






T-Molding



Threshold



Reducer


 Flush  
Stairnose

 Stair Tread  
Round Nose

**Molding Specifications**

Profile	W1 Width	W2	W3	T1 Height	T2	T3	Length	Weight Lbs
T-Molding	1-3/4"	3/8"	11/16"	3/8"	-	-	92"	2.7
Threshold	1-3/8"	3/8"	-	3/8"	3/16"	-	92"	2.7
Reducer	1-3/4"	-	-	3/8"	3/16"	-	92"	2.7
Flush Stairnose	4-5/16"	3-13/16"	-	1"	13/16"	5mm	92"	5.5
Stair Tread Round Nose	12"	-	-	1-1/5"	7/8"	5/16"	47-1/4"	7.17

**Item Code**

Color	T-Molding	Threshold	Reducer	Flush Stairnose	Stair Tread Round Nose
Bayfield	SPC4BATM	SPC4BATH	SPC4BARD	SPC4BASN	SPC4BASTR
Breaux Bridge	SPC4BBTM	SPC4BBTH	SPC4BBRD	SPC4BBSN	SPC4BBSTR
Champlain	SPC4CPTM	SPC4CPTH	SPC4CPRD	SPC4CPSN	SPC4CPSTR
Hartwell	SPC4HATM	SPC4HATH	SPC4HARD	SPC4HASN	SPC4HASTR
Lochloosa	SPC4LLTM	SPC4LLTH	SPC4LLRD	SPC4LLSN	SPC4LLSTR
Mackinac Island	SPC4MITM	SPC4MITH	SPC4MIRD	SPC4MISN	SPC4MISTR
Marble Falls	SPC4MFTM	SPC4MFTH	SPC4MFRD	SPC4MFSN	SPC4MFSTR
Sandpoint	SPC4SPTM	SPC4SPTH	SPC4SPRD	SPC4SPSN	SPC4SPSTR
Victoria	SPC4VITM	SPC4VITH	SPC4VIRD	SPC4VISN	SPC4VISTR
Yellowstone	SPC4YSTM	SPC4YSTH	SPC4YSRD	SPC4YSSN	SPC4YSSTR



Our fully waterproof loose-lay LVP flooring is as durable as it is beautiful. Utilizing a 20 mil Embossed “Tough as Nails” wearlayer, this easy to install flooring option is perfect for all projects. From the boardroom to the mudroom, the Shires Collection is everything you need in loose-lay LVP.



**Durham**  
SC5DU9D



**Essex**  
SC5ES9D



**Hampshire**  
SC5HA9D



**Kent**  
SC5KE9D



**Manchester**  
SC5MA9D



**Suffolk**  
SC5SU9D



**Wiltshire**  
SC5WI9

# FACT SHEET

Testing		
Formaldehyde Rating	EN717-1 (California Sec. 01350)	Class E1 (Passed)
Total VOC	California Sec. 01350	Passed (A+)
Fire Rating	Bf1-S1	Passed
Static Load Limit	ASTM F970-07	250 lbf .048mm
Heat Resistance	ASTM F1514-03	0.8
	Floor Score Certified	
	Phthalate Free	
	Fiberglass Enhanced Core	

Specifications	
Size	5mm x 9" x 60"
Wear Layer	20 mil
Finish	Polyurethane
Surface	Embossed
Edge Treatment	Square Edge
Color Variation	Medium
Light Sensitivity	Low
Installation *(on, above, or below grade)	Loose Lay / Glue Down
Packaging	30.04 sq/ft per carton 1,682.24 sq/ft per pallet 56 cartons per pallet
Packaging (Wiltshire)	22.41 sq/ft per carton 1,165.32 sq/ft per pallet 52 cartons per pallet
Warranty	Lifetime Residential Warranty 15 Year Commercial
*See full warranty at <a href="http://LWFlooring.com">LWFlooring.com</a>	





Times Square

The Metro Luxe Collection combines refined hardwood visuals with durable, water-resistant capabilities on expansive 9"x 60" glue-down planks, balancing urban style with upscale appeal for the ultimate statement in contemporary design.



**Astoria**  
ML2AS9



**Broadway**  
ML2BR9




**Gramercy Park**  
ML2GP9



**Staten Island**  
ML2SI9



**Times Square**  
ML2TS9

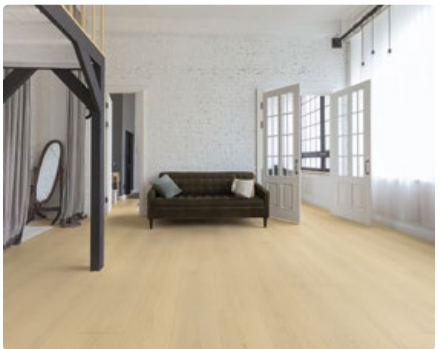

**West Village**  
ML2WV9



# FACT SHEET

Testing		
IIC Sound Testing*		56
Fire Rating (European Fire Classification)		Class Bfl-S1
Wear Resistance (Rotations)	(EN 649:2011)	1.6 mm <sup>3</sup> /100 revolutions
NALFA Castor Chair (25000 Cycles)		PASS
Peel Resistance (ENISO 24324:2012)	Longitudinal Direction: 95n/50mm	Cross Direction: 90n/50mm
Resistance to Heat (ASTMF1514-03)		ΔE*ab: 0.8
*Sound testing will vary depending upon floor/ceiling assembly		
Floor Score Certified		
Phthalate Free		

Specifications	
Size	2.5mm x 9" x 60"
Wear Layer	20 mil
Finish	Polyurethane
Surface	Embossed (Gramercy - Embossed in Register)
Edge Treatment	Micro Bevel
Architect Folder	S-MLUAFD
Installation *(on, above, or below grade)	Glue Down, Dryback
Packaging	44.88 sq/ft per carton 2,513.28 sq/ft per pallet 56 cartons per pallet
Warranty	Lifetime Residential Warranty 25 Year Commercial
*See full warranty at <a href="http://LWFlooring.com">LWFlooring.com</a>	





Modern style meets classic charm with the Uptown Avenue Collection – Featuring realistic hardwood aesthetics on fully water-resistant, 9” x 60” glue-down planks, designed to deliver lasting performance underfoot.



**Burlington**  
UA2BU9



**Dover**  
UA2DO9



**Medford Park**  
UA2ME9



**Nantucket**  
UA2NA9



**Quincy**  
UA2QU9



**Weston**  
UA2WE9



# FACT SHEET

Testing		
IIC Sound Testing*		56
Fire Rating (European Fire Classification)		Class Bfl-S1
Wear Resistance (Rotations)	(EN 649:2011)	1.6 mm <sup>3</sup> /100 revolutions
NALFA Castor Chair (25000 Cycles)		PASS
Peel Resistance (ENISO 24324:2012)	Longitudinal Direction: 95n/50mm	Cross Direction: 90n/50mm
Resistance to Heat (ASTMF1514-03)		ΔE*ab: 0.8
*Sound testing will vary depending upon floor/ceiling assembly		
Floor Score Certified		
Phthalate Free		

Specifications	
<b>Size</b>	2mm x 9" x 60"
<b>Wear Layer</b>	12 mil
<b>Finish</b>	Polyurethane
<b>Surface</b>	Embossed (Medford - Embossed in Register)
<b>Edge Treatment</b>	Micro Bevel
<b>Architect Folder</b>	S-MLUAFD
<b>Installation</b> *(on, above, or below grade)	Glue Down, Dryback
<b>Packaging</b>	56.10 sq/ft per carton 3,141.6 sq/ft per pallet 56 cartons per pallet
<b>Warranty</b>	Lifetime Residential Warranty 25 Year Light Commercial
*See full warranty at <a href="http://LWFlooring.com">LWFlooring.com</a>	





The Township Collection features a fully waterproof vinyl glue down plank that is designed for both residential and multifamily usage. A high impact, registered, and embossed wear layer protects this beautiful wood visual line for years to come.



**Georgetown**  
TS2GE7



**Hudson**  
TS2HU7



**Rockport**  
TS2RO7



**Springdale**  
TS2SP7



**Nashville**  
TS2NA7



**Seattle**  
TS2SE7

# FACT SHEET

Testing		
Critical Radiant Flux	ASTM E648	Class I
Surface Flammability	DOC FF 1-70	Passed
Coefficient of Friction	ASTM 2047	Passed >0.6
Static Load Limit	ASTM F970	1300 lbs
STC Sound Testing*	ASTM E90/E413	52
IIC Sound Testing*	ASTM E492/E989	50
*Sound testing will vary depending upon floor/ceiling assembly		
Product Classification	F1700 Class III	Type B
	Floor Score Certified	
	Phthalate Free	
PVC		100% Virgin PVC

Specifications	
Size	2mm x 7-1/4" x 48" Nominal
Wear Layer	8 mil
Finish	Polyurethane UV Matte
Surface	Embossed
Edge Treatment	No Bevel - Square
StrapSet Sample SKU's Only	S-TS2x4 S-TS2x6
Installation *(on, above, or below grade)	Full Spread Adhesive
Packaging	58.05 sq/ft per carton 3,192.75 sq/ft per pallet 55 cartons per pallet
Warranty	20 Year Waterproof 20 Year Residential Wear 10 Year Light Commercial Wear
*See full warranty at <a href="http://LWFFlooring.com">LWFFlooring.com</a>	





**W**  
FLOORING

floor  
score  
CERTIFIED BY  
SCS Global Services



Whitney

The Montclair Collection pairs innovative waterproof technology with stunning embossed in register features on 14mm-thick planks to offer a seamless balance of beauty, strength and long-term confidence underfoot.



**Alps**  
LMO14AL9



**Denali**  
LMO14DE9



**Everest**  
LMO14EV9



**Himalayas**  
LMO14HI9



**Mont Blanc**  
LMO14MB9



**Olympus**  
LMO14OL9



**Rainier**  
LMO14RA9




**Whitney**  
LMO14WH9


# FACT SHEET

Specifications	
<b>Size</b>	14mm x 9-3/8" x 72"
<b>Wear Layer</b>	AC4
<b>Finish</b>	Aluminum Oxide
<b>Surface</b>	Embossed in Register
<b>Edge Treatment</b>	Painted Beveled
<b>Attached Cushion</b>	EVA Pad
<b>Color Variation</b>	Low
<b>Light Sensitivity</b>	Low
<b>Installation</b> *(on, above, or below grade)	Click Lock, Click Floating Floor
<b>IIC Sound Testing</b>	55
<b>Packaging</b>	23.45 SF per carton 1125.60 SF per pallet 48 cartons per pallet
<b>Warranty</b>	Lifetime Residential Warranty 10 Year Light Commercial

\*See full warranty at [LWFlooring.com](http://LWFlooring.com)



T-Molding



Threshold




Reducer



Flush Stairnose



Overlap Stairnose



Stair Tread Round Nose

Molding Specifications								
Profile	W1	W2	W3	T1	T2	T3	Length	Weight
-	Width	-	-	Height	-	-	-	Lbs
T-Molding	1-3/4"	3/8"	11/16"	1/2"	-	-	92"	1.39
Threshold	1-3/8"	3/8"	-	11/16"	1/2"	-	92"	1.59
Reducer	1-3/4"	-	-	11/16"	1/2"	-	92"	1.76
Flush Stairnose	4-1/3"	3-3/4"	-	1-1/8"	9/16"	14mm	92"	5.7
Overlap Stairnose	2-5/32"	-	-	1"	-	11/16"	92"	5.7
Stair Tread Round Nose	11-13/16"	-	-	1-1/16"	9/16"	1/2"	47-1/4"	7.28

Item Code						
Color	T-Molding	Threshold	Reducer	Flush Stairnose	Overlap Stairnose	Stair Tread Round Nose
Alps	LMO14ALTM	LMO14ALTH	LMO14ALRD	LMO14ALSN	LMO14ALSNO	LMO14ALSTR
Denali	LMO14DETM	LMO14DETH	LMO14DERD	LMO14DESN	LMO14DESNO	LMO14DESTR
Everest	LMO14EVTM	LMO14EVTH	LMO14EVRD	LMO14EVSNO	LMO14EVSNO	LMO14EVSTR
Himalayas	LMO14HITM	LMO14HITH	LMO14HIRD	LMO14HISNO	LMO14HISNO	LMO14HISTR
Mont Blanc	LMO14MBTM	LMO14MBTH	LMO14MBRD	LMO14MBSNO	LMO14MBSNO	LMO14MBSTR
Olympus	LMO14OLTM	LMO14OLTH	LMO14OLRD	LMO14OLSN	LMO14OLSNO	LMO14OLSTR
Rainier	LMO14RATM	LMO14RATH	LMO14RARD	LMO14RASNO	LMO14RASNO	LMO14RASTR
Whitney	LMO14WHTM	LMO14WHTH	LMO14WHRD	LMO14WHSNO	LMO14WHSNO	LMO14WHSTR





LW Flooring is proud to introduce Odyssey, a truly 100% waterproof click lock/floating laminate floor. This collection has unmatched durability and uncompromised wood look visuals.



**Avalon**  
LOD12AL7



**Calypso**  
LOD12CA7



**Contessa**  
LOD12CO7



**Expedition**  
LOD12EX7



**Mariposa**  
LOD12MA7



**Nautilus**  
LOD12NA7



**Osprey**  
LOD12OS7



**Resplendent**  
LOD12RE7



**Serendipity**  
LOD12SE7



**Wanderlust**  
LOD12WA7



**Windsor**  
LOD12WI7




**Zodiac**  
LOD12ZO7

# FACT SHEET


Testing		
Thickness Swell	NALFA 3.2	Class 4
Xenon Light Resistance	NALFA 3.3	Class 4
Cleanability/Stain Resistance	NALFA 3.4	Class 4
Floor Score Certified		

Specifications	
<b>Size</b>	12.0 mm x 7-2/3" x 59-3/4"
<b>Wear Layer</b>	AC4
<b>Finish</b>	Aluminum Oxide
<b>Surface</b>	Embossed in Register
<b>Edge Treatment</b>	Four-Sided Painted Enhanced Bevel
<b>Attached Cushion</b>	2.0 mm EVA Cushion
<b>Color Variation</b>	Low
<b>Light Sensitivity</b>	Low
<b>Installation</b> *(on, above, or below grade)	Click Lock, Click Floating Floor
<b>Abrasion Classification:</b>	Melamine with Aluminum Oxide
<b>Packaging</b>	19.08 SF per carton 1,144.80 SF per pallet 60 cartons per pallet
<b>Warranty</b>	Lifetime Residential Wear Lifetime Residential Stain & Fade 15 Year Light Commercial Wear
*See full warranty at <a href="http://LWFlooring.com">LWFlooring.com</a>	






T-Molding




Threshold




Reducer



Flush Stairnose



Overlap Stairnose



Stair Tread Round Nose

**Molding Specifications**


Profile	W1	W2	W3	T1	T2	T3	Length	Weight
-	Width	-	-	Height	-	-	-	Lbs
T-Molding	1-3/4"	3/8"	11/16"	15/32"	-	-	92"	1.39
Threshold	1-3/8"	3/8"	-	19/32"	1/2"	-	92"	1.59
Reducer	1-3/4"	-	-	19/32"	1/2"	-	92"	1.76
Flush Stairnose	4-1/3"	3-13/16"	-	15/16"	7/16"	12mm	92"	5.7
Overlap Stairnose	2-3/16"	-	-	11/16"	-	-	92"	5.7
Stair Tread Round Nose	11-13/16"	-	-	1-1/16"	9/16"	1/2"	47-1/4"	7.28

**Item Code**

Color	T-Molding	Threshold	Reducer	Flush Stairnose	Overlap Stairnose	Stair Tread Round Nose
Avalon	LOD12ALTM	LOD12ALTH	LOD12ALRD	LOD12ALSN	LOD12ALSNO	LOD12ALSTR
Calypso	LOD12CATM	LOD12CATH	LOD12CARD	LOD12CASN	LOD12CASNO	LOD12CASTR
Contessa	LOD12COTM	LOD12COTH	LOD12CORD	LOD12COSN	LOD12COSNO	LOD12COSTR
Expedition	LOD12EXTM	LOD12EXTH	LOD12EXRD	LOD12EXSN	LOD12EXSNO	LOD12EXSTR
Mariposa	LOD12MATM	LOD12MATH	LOD12MARD	LOD12MASN	LOD12MASNO	LOD12MASTR
Nautilus	LOD12NATM	LOD12NATH	LOD12NARD	LOD12NASN	LOD12NASNO	LOD12NASTR
Osprey	LOD12OSTM	LOD12OSTH	LOD12OSRD	LOD12OSSN	LOD12OSSNO	LOD12OSSTR
Resplendent	LOD12RETM	LOD12RETH	LOD12RERD	LOD12RESN	LOD12RESNO	LOD12RESTR
Serendipity	LOD12SETM	LOD12SETH	LOD12SERD	LOD12SESN	LOD12SESNO	LOD12SESTR
Wanderlust	LOD12WATM	LOD12WATH	LOD12WARD	LOD12WASN	LOD12WASNO	LOD12WASTR
Windsor	LOD12WITM	LOD12WITH	LOD12WIRD	LOD12WISN	LOD12WISNO	LOD12WISTR
Zodiac	LOD12ZOTM	LOD12ZOTH	LOD12ZORD	LOD12ZOSN	LOD12ZOSNO	LOD12ZOSTR



The Cascades Collection boasts exceptional durability, complete waterproof protection and a timeless, worry-free style for any room in your home.

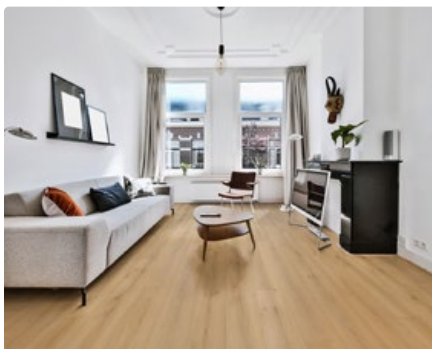

**Abbott**  
LCA10AB7



**Bowstring**  
LCA10B07



**Emory**  
LCA10EM7



**Idlewild**  
LCA10ID7



**Lafayette**  
LCA10LA7



**Northshore**  
LCA10NO7



**Pemberton**  
LCA10PE7



**Rainwater**  
LCA10RA7


# FACT SHEET

Specifications	
<b>Size</b>	10mm x 7-2/3" x 59-1/2"
<b>Wear Layer</b>	AC4
<b>Finish</b>	Aluminum Oxide
<b>Surface</b>	Embossed in Register
<b>Edge Treatment</b>	Painted Beveled
<b>Attached Cushion</b>	IXPE Pad
<b>Color Variation</b>	Low
<b>Light Sensitivity</b>	Low
<b>Installation</b> *(on, above, or below grade)	Click Lock, Click Floating Floor
<b>IIC Sound Testing</b>	61
<b>Packaging</b>	25.35 SF per carton 1521.00 SF per pallet 60 cartons per pallet
<b>Warranty</b>	Lifetime Residential Warranty 10 Year Light Commercial

\*See full warranty at [LWFFlooring.com](http://LWFFlooring.com)




T-Molding



Threshold



Reducer


 Flush  
Stairnose

 Stair Tread  
Round Nose

Molding Specifications								
Profile	W1	W2	W3	T1	T2	T3	Length	Weight
-	Width	-	-	Height	-	-	-	Lbs
T-Molding	1-3/4"	3/8"	11/16"	1/2"	-	-	92"	1.39
Threshold	1-3/8"	3/8"	-	1/2"	1/2"	-	92"	1.59
Reducer	1-3/4"	-	-	19/32"	1/2"	-	92"	1.76
Flush Stairnose	4-1/2"	3-13/16"	-	15/16"	7/16"	10mm	92"	5.7
Stair Tread Round Nose	11-13/16"	-	-	1-1/16"	9/16"	1/2"	47-1/4"	7.28

Item Code					
Color	T-Molding	Threshold	Reducer	Flush Stairnose	Stair Tread Round Nose
Abbott	LCA10ABTM	LCA10ABTH	LCA10ABRD	LCA10ABSN	LCA10ABSTR
Bowstring	LCA10BOTM	LCA10BOTH	LCA10BORD	LCA10BOSN	LCA10BOSTR
Emory	LCA10EMTM	LCA10EMTH	LCA10EMRD	LCA10EMSN	LCA10EMSTR
Idlewild	LCA10IDTM	LCA10IDTH	LCA10IDRD	LCA10IDSN	LCA10IDSTR
Lafayette	LCA10LATM	LCA10LATH	LCA10LARD	LCA10LASN	LCA10LASTR
Northshore	LCA10NOTM	LCA10NOTH	LCA10NORD	LCA10NOSN	LCA10NOSTR
Pemberton	LCA10PETM	LCA10PETH	LCA10PERD	LCA10PESN	LCA10PESTR
Rainwater	LCA10RATM	LCA10RATH	LCA10RARD	LCA10RASN	LCA10RASTR





**BOSTIK**


**A Global Leader in Adhesive Technologies**

from







LW Flooring is proud to offer industry leading adhesive products to maximize the lifetime and natural beauty of your LW floors. Each adhesive has recommended usages with specific product types, depending on your installation needs.




**WOOD P212**  
 Bostik's Wood P212 Bond™ is an easy-to-trowel urethane adhesive and moisture-vapor-control membrane. It provides a flexible and tenacious bond to a variety of surfaces. Bostik Wood P212 Bond™'s elastomeric characteristics allow the adhesive to move with the wood as it expands and contracts over the life of the floor. Bostik's Wood P212 Bond™ exhibits a long open time making installation easier and faster. This adhesive has low VOCs and does NOT contain any water.

**EFA+**  
 Bostik's EFA+™ is an easy-to-trowel urethane adhesive and moisture-control membrane. It provides a flexible and tenacious bond to a variety of surfaces. Bostik's EFA+™ elastomeric characteristics allow the adhesive to move with the wood as it expands and contracts over the life of the floor. Bostik's EFA+™ exhibits a long open time making installation easier and faster. This adhesive has low VOCs and does NOT contain any water.

**PRO-MSP**  
 Pro-MSP™ is a hardwood and bamboo adhesive and moisture vapor control membrane all in one. This adhesive formulation maintains long term durability and moisture vapor control properties, and it is easy to spread and clean off of prefinished flooring before and after cure. This adhesive has low VOC's (as measured per EPA Method 24) and does NOT contain any water.

**LOCK A499**  
 LOCK A499 PSA™ is a universal, high-tack, water-based adhesive specifically formulated for the installation of most resilient flooring in residential and commercial applications. LOCK A499 PSA™ is a 0 VOC formulation. LOCK A499 PSA™ flashes off quickly, but has a long working time. It displays tenacious bond strength. LOCK A499 PSA™ has been formulated with exceptional application properties including excellent trowelability, fast tack/grab, low odor, and easy cleanup.



## WOOD P212

## EFA+

CHEMICAL & PHYSICAL PROPERTIES				
<b>Use Environments</b>	Residential	Yes		
	Offices/Light Commercial	Yes		
	Heavy Commercial	Yes		
	Hospital	No		
	Exterior	No		
	Wet Areas	No		
<b>Substrates</b>	Concrete	Yes		
	Plywood	Yes		
	OSB	Yes		
	Recycled Rubber Underlayment	Yes		
	Well-Bonded Vinyl	Yes		
	Terrazzo	Yes		
	Ceramic Tile	Yes		
	Gypsum Underlayments <sup>1</sup>	Yes		
	Cement Patch/Underlayment	Yes		
<b>Flooring Types</b>	Solid Hardwood	Yes		
	Engineered Hardwood	Yes		
	Bamboo	Yes		
	Cork	Yes		
	Parquet	Yes		
	Plywood	Yes		
<b>Cured Physical Properties</b>	Cure Time <sup>2</sup>			
	Light foot traffic	6 to 8 hours		
	Normal foot traffic	8 to 12 hours		
	Water Vapor Permeability <sup>3</sup>	< 0.9		
	Concrete Moisture Vapor Limits for subfloor moisture vapor protection:			
	For engineered hardwood:			
	ASTM 1869 Calcium Chloride Method	≤ 12 lbs/1000 sq ft /24 hrs		
	ASTM 2170 Relative Humidity Test	≤ 85% RH		
	For solid hardwood or bamboo:			
	ASTM 1869 Calcium Chloride Method	≤ 3 lbs/1000 sq ft /24 hrs		
	ASTM 2170 Relative Humidity Test	≤ 75% RH		
Elongation	>180%			
Service Temperature	-40°F to 150°F (-40°C to 66°C)			
<b>Application Properties</b>	Ease of Troweling	Easy		
	Odor	Mild		
	Open/Working Time <sup>4</sup>	180 minutes		
	Color	Off White		
	Density (lbs/gallon)	15.1		
	Percentage of Water <sup>5</sup>	0%		
	Percentage of Adhesive Coverage Required:	For Moisture-Vapor Protection	For Bond	
	Engineered	95%	>80%	
	Solid	95%	>95%	
	Application Temperature	50°F to 100°F (10°C to 38°C)		
<b>Chemical Properties</b>	Chemistry Type	1-Part Urethane		
	Adhesive Type	Moisture-Vapor Cure		
	VOCs (measured per EPA Method 24)	Yes (<20 g/L)		
	Flash Point, closed cup	145°F (63°C)		
<b>LEED® v4 Contribution</b>	IEQ - Low-Emitting Materials for Interior Adhesives & Sealants	Up to 3 Points <sup>6</sup>		

CHEMICAL & PHYSICAL PROPERTIES				
<b>Use Environments</b>	Residential	Yes		
	Offices/Light Commercial	Yes		
	Heavy Commercial	Yes		
	Hospital	No		
	Exterior	No		
	Wet Areas	No		
<b>Substrates</b>	Concrete	Yes		
	Plywood	Yes		
	OSB	Yes		
	Recycled Rubber Underlayment	Yes		
	Well-Bonded Vinyl	Yes		
	Terrazzo	Yes		
	Ceramic Tile	Yes		
	Cement Backer Board	Yes		
	Gypsum Underlayments <sup>1</sup>	Yes		
		Cement Patch/Underlayment	Yes	
		Solid Hardwood	Yes	
<b>Flooring Types</b>	Engineered Hardwood	Yes		
	Bamboo	Yes		
	Cork	Yes		
	Parquet	Yes		
	Plywood	Yes		
	Ceramic Tile, Marble, Stone Inlays <sup>2</sup>	Yes		
<b>Cured Physical Properties</b>	Cure Time <sup>3</sup>			
	Light foot traffic	6 to 8 hours		
	Normal foot traffic	8 to 12 hours		
	Water Vapor Permeability <sup>4</sup>	< 0.9		
	Concrete Moisture Vapor Limits for subfloor moisture vapor protection:			
	For engineered hardwood:			
	ASTM 1869 Calcium Chloride Method	≤ 15 lbs/1000 sq ft /24 hrs		
	ASTM 2170 Relative Humidity Test	≤ 87% RH		
	For solid hardwood or bamboo:			
	ASTM 1869 Calcium Chloride Method	≤ 3 lbs/1000 sq ft /24 hrs		
	ASTM 2170 Relative Humidity Test	≤ 75% RH		
Elongation	>180%			
Service Temperature	-40°F to 150°F (-40°C to 66°C)			
<b>Application Properties</b>	Ease of Troweling	Easy		
	Odor	Mild		
	Open/Working Time <sup>5</sup>	180 minutes		
	Color	White		
	Density (lbs/gallon)	13.7		
	Percentage of Water <sup>6</sup>	0%		
	Percentage of Adhesive Coverage Required:	For Moisture Protection	For Bond	
	Engineered	95%	>80%	
	Solid	95%	>95%	
	Application Temperature	50°F to 100°F (10°C to 38°C)		
<b>Chemical Properties</b>	Chemistry Type	1-Part Urethane		
	Adhesive Type	Moisture Cure		
	VOC Compliant (measured per EPA Method 24)	Yes (20 g/L)		
	Flash Point, closed cup	145°F (63°C)		
<b>LEED® v4 Contribution</b>	IEQ - Low-Emitting Materials for Interior Adhesives & Sealants	Up to 3 Points <sup>7</sup>		

<sup>1</sup> Dry, above grade

<sup>2</sup> Humidity affects cure to a greater degree than temperature; the higher the humidity, the faster the cure. Under normal conditions, light foot traffic is acceptable after 6 to 8 hours; normal traffic after 12-16 hours.

<sup>3</sup> Per ASTM E-96 Standard Test Methods for Water Vapor Transmission of materials. Ratings are g/m<sup>2</sup>-24 hour-mmHG.

<sup>4</sup> Please refer to the Open/Working Time Chart.

<sup>5</sup> Per ASTM E203-01 Standard Test Method for water using Volumetric Karl Fischer Titration Method. Results rounded to the nearest tenth. Test Method has error range of +/- 0.2%.

<sup>6</sup> Per LEED® v4 BD+C rating system, taking into account all other interior adhesives & sealants applied on site.

<sup>1</sup> Dry, above grade

<sup>2</sup> Residential or light commercial only

<sup>3</sup> Humidity affects cure to a greater degree than temperature; the higher the humidity, the faster the cure. Under normal conditions, light foot traffic is acceptable after 6 to 8 hours; normal traffic after 12-16 hours.

<sup>4</sup> Per ASTM E-96 Standard Test Methods for Water Vapor Transmission of materials. Ratings are g/m<sup>2</sup>-24 hour-mmHG.

<sup>5</sup> Please refer to the Open/Working Time Chart.

<sup>6</sup> Per ASTM E203-01 Standard Test Method for water using Volumetric Karl Fischer Titration Method. Results rounded to the nearest tenth. Test Method has error range of +/- 0.2%.

<sup>7</sup> Per LEED® v4 BD+C rating system, taking into account all other interior adhesives & sealants applied on site.

### PRO-MSP

CHEMICAL & PHYSICAL PROPERTIES				
<b>Chemical Properties</b>	Chemistry Type	1-part MS Polymer Adhesive		
	Adhesive Type	Moisture Cure		
	VOC Compliant (calculated per SCAQMD Rule 1168)	Yes (33 g/L)		
	Solvent Free	Yes		
	Flash Point	>200°F (93°C)		
<b>Use Environments</b>	Residential	Yes		
	Offices/Light Commercial	Yes		
	Heavy Commercial/Retail	Yes		
	Hospital/Healthcare	No		
	Industrial	No		
	Exterior	No		
	Wet Areas	No		
<b>Substrates</b>	Concrete	Yes		
	Concrete Board	Yes		
	Concrete Patch/SLU	Yes		
	Gypsum Underlayment	Yes		
	Plywood	Yes		
	OSB	Yes		
	Ceramic Tile	Yes		
	Terrazzo	Yes		
	Well-Bonded Vinyl	Yes		
	<b>Flooring Types</b>	Solid Hardwood	Yes	
Engineered Hardwood		Yes		
Bamboo		Yes		
Cork		Yes		
Parquet		Yes		
Ceramic Tile, Marble, Stone Inlays*1		No		
<b>Application Properties</b>		Application Method	Trowel	
	Ease of Application	Easy		
	Odor	Slight		
	Required Flash Time	0 min		
	Open/Working Time*2	60 min		
	Color	Brown		
	Density (lbs/gallon)	15.44		
	Wet Lay	Yes		
	Walk-On-Work prior to cure	No		
	Percent of Adhesive Coverage & Transfer Required	For MVER Protection	For Bond	
		Engineered	100%	>80%
	Solid	100%	>95%	
	Application Temp Range	50°F-90°F (10°C-32°C)		
	Shelf Life	1 year		
	Ease of Clean, Wet	Very Easy		
<b>Cured Physical Properties</b>	Ease of Clean, Cured	Easy		
	Dry Time: Light Traffic	6-8 hrs		
	Dry Time: Normal Traffic	12-24 hrs		
	Service Temp Range	-40°F to 150°F (-40°C to 66°C)		
	Elongation	>100%		
	Water Vapor Permeability*3	<0.8		
	Concrete Moisture Vapor Limits for subfloor moisture vapor protection:			
	For engineered hardwood			
	ASTM 1869 Calcium Chloride Method	≤ 15 lbs/ 1000 sq ft /24 hrs		
	ASTM 2170 Relative Humidity Test	≤ 87% RH		
	For solid hardwood or bamboo			
	ASTM 1869 Calcium Chloride Method	≤ 3 lbs/ 1000 sq ft /24 hrs		
	ASTM 2170 Relative Humidity Test	≤ 75% RH		
	<b>Sound Reduction Performance</b>	ASTM E492-09 IIC		
		6" concrete slab with no ceiling	50 dB	
6" concrete slab with 1 layer 5/8" gypsum board ceiling		64 dB		
ASTM E90-09 STC				
6" concrete slab with no ceiling		53 dB		
6" concrete slab with 1 layer 5/8" gypsum board ceiling		61 dB		

\*1 Light commercial and/or residential applications.

\*2 Please refer to Open/Working Time chart.

\*3 Per ASTM F-1249 standard test method for water vapor transmission rate through plastic film and sheeting using a modulated infrared sensor. Ratings are g/m<sup>2</sup>-24 hr-mmHG.

### LOCK A499

CHEMICAL & PHYSICAL PROPERTIES		
<b>Use Environments</b>	Offices/Light Commercial	Yes
	Residential	Yes
	Hospitality	Yes
	Hospital/Healthcare	Yes
	Heavy Commercial	Yes
	Exterior	No
	Wet Areas	No
<b>Substrates</b>	Concrete	Yes
	APA-Grade Plywood	Yes
	Gypsum Underlayment	Yes*
	Well-Bonded Vinyl	Yes
	Terrazzo	Yes
	OSB Underlayment	No
	Prepared Metal	No
<b>Flooring Types</b>	Asphalt	No
	LVT or LVP	Yes
	Sheet Vinyl	Yes
	VCT	Yes
	Carpet Tiles	Yes
	PVC Backings	No
	Olefin-Backed Vinyl	Yes
	Rubber	No
	Linoleum	No
	<b>Cured Physical Properties</b>	Full Return to Service
Rolling Loads Capacity		Moderate
Slab Moisture Limits		99% RH (90% for sheet vinyl)
pH Resistance		12.0 pH (10.0 for sheet vinyl)
<b>Uncured Physical Properties</b>		Ease of Troweling
	Odor	Slight
	Required Flash Time	10-20 minutes
	Working Time	4 hours
	Color	White
	Density (lbs/gallon)	8.3
	Freeze/Thaw	Do Not Freeze
<b>Chemical Properties</b>	Chemistry Type	Acrylic
	Adhesive Type	Pressure Sensitive
	VOC**	0 g/L
	Plasticizer Resistant?	Yes
	Solvent Free?	Yes
	Flash Point	>212°F

\* Dry, above-grade applications only

\*\* As calculated per SCAQMD Rule 1168





# QUALITY PRODUCTS. QUALITY CARE.

LW Flooring puts our customers' best interest at the forefront.

If you need any assistance, we are here to help.

Reach out to us Monday - Friday, 8AM - 6PM EST.

