

CATALOG

— 2026 —



L&V
FLOORING



Who is LW Flooring?

From our humble beginnings in 2007 in Gainesville, Florida, LW Flooring has been built on a foundation of not just quality products that are built to last, but quality in our people and the relationships we build over the years.

Yes, we sell gorgeous engineered hardwood, tough as nails vinyl plank and laminate hard surface products. We also sell the simplicity of beauty, refinement, vision, purpose, lasting quality, and our people understand this in every one of our collections. These collections are carefully thought out for your home or project.

At LW Flooring we can't wait to meet your vision, gain your trust, and help you find the floor you can fall in love with!

Our Mission.

LW Flooring is a Florida based flooring distributor that is on a mission to help bring unmatched beauty, durability, sustainability, inspiration, along with high quality products and services to our partners and their clients. We inspire our partners with vision and reward them with incredible service while striving to expand our market leadership. At LW Flooring we believe it is not just a floor, but **"A Lifetime of Memories"**.



Navigate our Table of Contents.

To visit collection webpages, please select or scan the QR Codes on the appropriate catalog page, or visit our website at lwflooring.com.

Engineered Hardwood

Paradise Island.....	5
Pristine.....	7
Vintage Elegance.....	9
Renaissance.....	11
Sonoma Valley.....	13
French Impressions.....	16
Traditions.....	18

Waterproof Vinyl

Grand Coast.....	23
Riverside.....	25
Riverstone.....	28
Lakeview.....	31
Shires.....	34
Metro Luxe.....	36
Uptown Avenue.....	38
Township.....	40

Laminate

Montclair.....	42
Odyssey.....	44
Cascades.....	47

Adhesive

Bostik Adhesive.....	50
----------------------	----



ENGINEERED HARDWOOD



LW Flooring is proud to present our full line of engineered wood flooring that was envisioned & designed to exceed the demands of builders, interior designers, architects, and residential consumers.

NAPOLI
RENAISSANCE COLLECTION | RCWO14NA7



The Paradise Island Collection is a true masterpiece that can transform any space with its elegant refinement, natural beauty and sophistication. Featuring 10-1/4" wide European Oak planks 5/8" thick and up to 86-5/8" in length along with a 4mm wire-brushed veneer, this collection is the perfect union of nature's splendor and human artistry. From the shoreline to the ridgeline- Paradise Island is at home anywhere.



Alimia
PIWO15A10



Bali
PIWO15B10



Caicos
PIWO15C10



Fiji
PIWO15F10



Hawea
PIWO15HA10




Maui
PIWO15M10



Nevis
PIWO15N10



Oahu
PIWO15O10



Paxos
PIWO15PA10



Rosario
PIWO15R10




Tahiti
PIWO15T10


FACT SHEET

Specifications	
Size	5/8" x 10-1/4" x RL up to 86-5/8"
Species	European White Oak
Finish	Polyurethane with Aluminum Oxide
Surface	Wirebrushed
Edge Treatment	Micro-Bevel
Face Veneer	Sawn Face
Color Variation	Low/Medium/High
Light Sensitivity	Low/Medium
Gloss Level	All Colors <8
Certification	Lacey Act & Carb II Compliant
Installation *(on, above, or below grade)	Float, Glue Down, Nail
Milling	Tongue and Groove
Packaging	36.94 sq/ft per carton 1477.6 sq/ft per pallet 40 cartons per pallet
Warranty	Lifetime Residential Warranty 5 Year Light Commercial


*See full warranty at LWFFlooring.com



T-Molding



Threshold



Reducer


Flush
Stairnose

Molding Specifications								
Profile	W1 Width	W2	W3	T1 Height	T2	T3	Length	Weight Lbs
T-Molding	1-7/8"	1/2"	11/16"	5/8"	-	-	78"	2.7
Threshold	2"	27/32"	-	7/8"	1/2"	-	78"	2.7
Reducer	2"	-	-	19/32"	3/16"	-	78"	2.7
Flush Stairnose	3"	2-3/8"	-	13/16"	7/32"	5/8"	78"	5.5

Item Code				
Color	T-Molding	Threshold	Reducer	Flush Stairnose
Alimia	EW015ATM	EW015ATH	EW015ARD	EW015ASN
Bali	EW015BTM	EW015BTH	EW015BRD	EW015BSN
Caicos	EW015CTM	EW015CTH	EW015CRD	EW015CSN
Fiji	EW015FTM	EW015FTH	EW015FRD	EW015FSN
Hawea	EW015HATM	EW015HATH	EW015HARD	EW015HASN
Maui	EW015MTM	EW015MTH	EW015MRD	EW015MSN
Nevis	EW015NTM	EW015NTH	EW015NRD	EW015NSN
Oahu	EW015OTM	EW015OTH	EW015ORD	EW015OSN
Paxos	EW015PATM	EW015PATH	EW015PARD	EW015PASN
Rosario	EW015RTM	EW015RTH	EW015RRD	EW015RSN
Tahiti	EW015TTM	EW015TTH	EW015TRD	EW015TSN





The Pristine Collection includes Select Grade European White Oak with a combination of organic movement meeting inspired accents of undertone colors to capture the pure beauty of your space. Pristine features a 3mm premium sawn veneer that is 7-1/4" W x 9/16" thick and planks up to 74-3/4" RL.



Cambria
PCWO14C7



Hiawatha
PCWO14H7



Lambert
PCWO14L7



Monarch
PCWO14M7



Portage
PCWO14P7




Sonata
PCWO14S7


FACT SHEET

Specifications	
Size	9/16" x 7-1/2" x RL up to 74-3/4"
Species	European White Oak
Finish	Polyurethane with Aluminum Oxide
Surface	Wirebrushed
Edge Treatment	Micro-Bevel
Face Veneer	Sawn Face
Color Variation	Low
Light Sensitivity	Low
Gloss Level	3-5 All Colors Except Hiawatha(5-7)
Certification	Lacey Act & Carb II Compliant
Installation *(on, above, or below grade)	Float, Glue Down, Nail
Milling	Tongue and Groove
Packaging	31.09 sq/ft per carton 1243.60 sq/ft per pallet 40 cartons per pallet
Warranty	Lifetime Residential Warranty 5 Year Light Commercial


*See full warranty at LWFlooring.com



T-Molding



Threshold



Reducer


Flush
Stairnose

Molding Specifications								
Profile	W1 Width	W2	W3	T1 Height	T2	T3	Length	Weight Lbs
T-Molding	1-7/8"	1/2"	11/16"	5/8"	-	-	78"	2.7
Threshold	2"	7/8"	-	7/8"	1/2"	-	78"	2.7
Reducer	2"	-	-	9/16"	3/16"	-	78"	1.7
Flush Stairnose	2-3/8"	1-4/5"	-	13/16"	1/4"	9/16"	78"	1.7

Item Code				
Color	T-Molding	Threshold	Reducer	Flush Stairnose
Cambria	PCWO14CTM	PCWO14CTH	PCWO14CRD	PCWO14CSN
Hiawatha	PCWO14HTM	PCWO14HTH	PCWO14HRD	PCWO14HSN
Lambert	PCWO14LTM	PCWO14LTH	PCWO14LRD	PCWO14LSN
Monarch	PCWO14MTM	PCWO14MTH	PCWO14MRD	PCWO14MSN
Portage	EW014POTM	EW014POTH	EW014PORD	EW014POSN
Sonata	PCWO14STM	PCWO14STH	PCWO14SRD	PCWO14SSN





The Vintage Elegance Collection features American Hickory & European White Oak that provides a rustic visual symphony of dramatic depth in a UV Urethane / UV Lacquer wire-brushed finish. Utilizing a 4mm sawn face veneer and planks that are 7-1/4" W x 5/8" thick and up to 74-3/4" in length Vintage Elegance excels in warmth and craftsmanship.



Aspendale
VEAH15A7
American Hickory



Emilia
VEWO15E7
European White Oak



Kingsley
VEWO15K7
European White Oak




Mantua
VEWO15MA7
European White Oak



Norwich
VEWO15N7
European White Oak



Rosemont
VEWO15R7
European White Oak

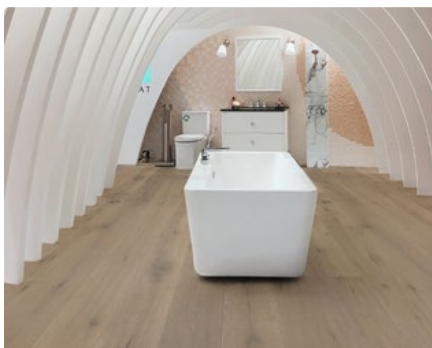


Urbino
VEWO15U7
European White Oak


FACT SHEET

Specifications	
Size	5/8" x 7-1/2" x RL up to 74-3/4"
Species	European White Oak (Aspendale - American Hickory)
Finish	UV Urethane / UV Lacquer
Surface	Wirebrushed
Edge Treatment	Micro-Bevel
Face Veneer	Sawn Face
Color Variation	Medium/High
Light Sensitivity	Low
Gloss Level	7-13 (Aspendale <10) (Emilia 4-7) (Mantua 2-9)
Certification	Lacey Act & Carb II Compliant
Installation *(on, above, or below grade)	Glue Down, Nail
Milling	Tongue and Groove
Packaging	31.09 sq/ft per carton 1243.60 sq/ft per pallet 40 cartons per pallet
Warranty	Lifetime Residential Warranty 5 Year Light Commercial


*See full warranty at LWFlooring.com



T-Molding



Threshold



Reducer



Flush
Stairnose

Quarter
Round

Molding Specifications								
Profile	W1	W2	W3	T1	T2	T3	Length	Weight
-	Width	-	-	Height	-	-	-	Lbs
T-Molding	1-7/8"	1/2"	11/16"	5/8"	-	-	78"	2.7
Threshold	2"	7/8"	-	7/8"	1/2"	-	78"	2.7
Reducer	2"	-	-	5/8"	3/16"	-	78"	1.7
Flush Stairnose	3"	2-3/8"	-	13/16"	3/16"	5/8"	78"	1.7
Quarter Round	3/4"	-	-	3/4"	-	-	78"	1.7

Item Code					
Color	T-Molding	Threshold	Reducer	Flush Stairnose	Quarter Round
Aspendale	AH15ATM	AH15ATH	AH15ARD	AH15ASN	-
Emilia	EWO14EMTM	EWO14EMTH	VEWO15EMRD	VEWO15EMSN	-
Kingsley	RWO15KTM	RWO15KTH	RWO15KRD	RWO15KSN	RWO15KQR
Mantua	EWO14MATM	EWO14MATH	VEWO15MARD	VEWO15MASN	-
Norwich	VEWO15NTM	VEWO15NTH	VEWO15NRD	VEWO15NSN	-
Rosemont	RWO15RTM	RWO15RTH	RWO15RRD	RWO15RSN	RWO15RQR
Urbino	VEWO14URTM	VEWO14URTH	VEWO15URRD	VEWO15URSN	-



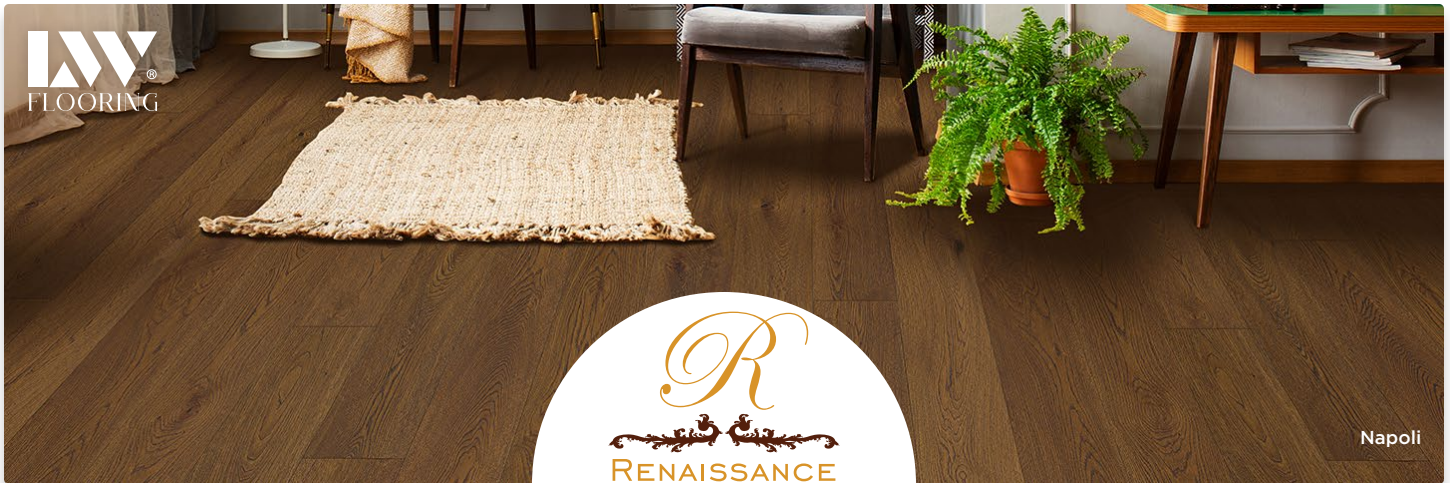

The Renaissance Collection, measuring 7-1/2" W x 9/16" thick with planks up to 74-3/4"L, offers a versatile and classic 3mm veneer in a European White Oak wire-brushed finish. Renaissance sets to inspire without sacrifice, utilizing timeless charm and authentic refusal of design limitation. Warm meets cool in this collection with undeniable sensory interest.



Avelino
RCWO14AV7



Capri
RCWO14C7



Elba
RCWO14EL7



Jenne
RCWO14J7




Klausen
RCWO14KL7



Lucca
RCWO14LU7



Modena
RCWO14MO7



Napoli
RCWO14NA7



Palermo
RCWO14PA7




Ravenna
RCWO14RA7




Sorrento
RCWO14SO7

FACT SHEET


Specifications	
Size	9/16" x 7-1/2" x RL up to 74-3/4" (Palermo RL 75-1/4")
Species	European White Oak
Finish	Polyurethane with Aluminum Oxide
Surface	Wirebrushed
Edge Treatment	Micro-Bevel
Face Veneer	Sawn Face Slice Face (Capri Sorrento)
Color Variation	Medium/High
Light Sensitivity	Low/Med
Gloss Level	2-8 (Jenne & Palermo <8)
Certification	Lacey Act & Carb II Compliant
Installation *(on, above, or below grade)	Float, Glue Down, Nail
Milling	Tongue and Groove
Packaging	31.09 sq/ft per carton (Palermo 31.25) 1243.60 sq/ft per pallet (Palermo 1250) 40 cartons per pallet
Warranty	Lifetime Residential Warranty 5 Year Light Commercial
*See full warranty at LWFlooring.com	




T-Molding



Threshold



Reducer


Flush
Stairnose

Molding Specifications								
Profile	W1 Width	W2	W3	T1 Height	T2	T3	Length	Weight Lbs
T-Molding	1-7/8"	1/2"	11/16"	5/8"	-	-	78"	1.7
Threshold	2"	7/8"	-	7/8"	1/2"	-	78"	2.7
Reducer	2"	-	-	9/16"	3/16"	-	78"	1.7
Flush Stairnose	2-3/8"	1-4/5"	-	13/16"	1/4"	9/16"	78"	1.7

Item Code				
Color	T-Molding	Threshold	Reducer	Flush Stairnose
Avelino	RCWO14AVM	RCWO14AVH	RCWO14AVD	RCWO14AVN
Capri	RCWO14CTM	RCWO14CTH	RCWO14CRD	RCWO14CSN
Elba	RCWO14ELM	RCWO14ELH	RCWO14ELD	RCWO14ELN
Jenne	EW014JTM	EW014JTH	EW014JRD	EW014JSN
Klausen	RCWO14KLM	RCWO14KLH	RCWO14KLD	RCWO14KLN
Lucca	RCWO14LUM	RCWO14LUH	RCWO14LUD	RCWO14LUN
Modena	RCWO14MOM	RCWO14MOH	RCWO14MOD	RCWO14MON
Napoli	RCWO14NAM	RCWO14NAH	RCWO14NAD	RCWO14NAN
Palermo	EW014PTM	EW014PTH	EW014PRD	EW014PSN
Ravenna	RCWO14RAM	RCWO14RAH	RCWO14RAD	RCWO14RAN
Sorrento	RCWO14SOTM	RCWO14SOTH	RCWO14SORD	RCWO14SOSN





The Sonoma Valley Collection is LW's most diverse wood offering which includes Hickory, Walnut, and European Oak species in varying widths, groundbreaking movements, lively accents, and deep textures. This intriguing wood line features a 2mm veneer that goes from rustic to regal all in one stunning collection.



Amarone
SV2AH12A37
American Hickory



Cabernet
SV2AH12C37
American Hickory



Grenache
SVAH12G37
American Hickory



Merlot
SV2AH12M37
American Hickory



Sherry
SV2AH12S37
American Hickory



Tokaji
SVAH12T7
American Hickory



Hermitage
SVAH12H7
American Pecan



Ives
SVAH12I7
American Pecan



Port
SVAW12P7
American Walnut



Brunello
SVWO12B7
European White Oak



Chardonnay
SVWO12C7P
European White Oak



Godello
SVWO12GO7
European White Oak



Madeira
SVWO12MA7P
European White Oak



Rossara
SVWO12RS7
European White Oak



Syrah
SVWO12S7
European White Oak

FACT SHEET

Specifications


Color	Size	Sq/ft per Carton	Sq/ft per Pallet	Ctns. per Pallet	Light Sensitivity
Amarone	1/2"x 3"&7-1/2" mixed x RL up to 74-3/4"	21.93	1491.24	68	Low
Brunello	1/2" x 7-1/2"x RL up to 75-1/4"	31.25	1406.25	45	Mid-Low
Cabernet	1/2"x 3"&7-1/2" mixed x RL up to 74-3/4"	21.93	1491.24	68	Low
Chardonnay	1/2" x 7-1/2"x RL up to 75-1/4"	31.25	1406.25	45	Mid-Low
Godello	1/2" x 7-1/2" x 75-1/4" RL	31.25	1406.25	45	Mid-Low
Grenache	1/2"x 3"&7-1/2" mixed x RL up to 74-3/4"	21.93	1,491.24	68	Low
Hermitage	1/2" x 7-1/2" x 82-5/8" RL	25.77	1,417.35	55	Low
Ives	1/2" x 7-1/2" x 82-5/8" RL	25.77	1,417.35	55	Low
Madeira	1/2" x 7-1/2" x RL up to 75-1/4"	31.25	1406.25	45	Mid-Low
Merlot	1/2"x 3"&7-1/2" mixed x RL up to 74-3/4"	21.93	1491.24	68	Low
Port	1/2" x 7-1/2" x RL up to 72"	22.46	1347.60	60	Low
Rossara	1/2" x 7-1/2" x RL up to 74-3/4"	31.09	1399.05	45	Medium
Sherry	1/2"x 3"&7-1/2" mixed x RL up to 74-3/4"	21.93	1491.24	68	Low
Syrah	1/2" x 7-1/2"x RL up to 75-1/4"	31.25	1406.25	45	Mid-Low
Tokaji	1/2" x 7-1/2" x RL up to 74-3/4"	23.32	1399.20	60	Medium

Color	Species	Gloss Level	Face Veneer	Color Variation	Surface
Amarone	American Hickory	6-10	Sawn Face	Medium	Wirebrushed & Handscraped
Brunello	European White Oak	≤8	Sliced Face	Medium	Wirebrushed
Cabernet	American Hickory	6-10	Sawn Face	Medium	Wirebrushed & Handscraped
Chardonnay	European White Oak	≤8	Sliced Face	Medium	Wirebrushed
Godello	European White Oak	≤8	Sliced Face	Medium	Wirebrushed
Grenache	American Hickory	6-10	Sliced Face	High	Wirebrushed & Handscraped
Hermitage	American Pecan	7±2	Sliced Face	Medium	Wirebrushed
Ives	American Pecan	7±2	Sliced Face	Medium	Wirebrushed
Madeira	European White Oak	≤8	Sliced Face	Medium	Wirebrushed
Merlot	American Hickory	6-10	Sawn Face	Medium	Wirebrushed & Handscraped
Port	American Walnut	6-10	Sliced Face	Medium	Wirebrushed
Rossara	European White Oak	5-8	Sliced Face	High	Wirebrushed
Sherry	American Hickory	6-10	Sawn Face	Medium	Wirebrushed & Handscraped
Syrah	European White Oak	≤8	Sliced Face	Medium	Wirebrushed
Tokaji	American Hickory	3-7	Sliced Face	High	Handscraped


Finish	Polyurethane with Aluminum Oxide
Edge Treatment	Micro-Bevel
Certification	Lacey Act & Carb II Compliant
Installation *(on, above, or below grade)	Float, Glue Down, Nail
Milling	Tongue and Groove
Warranty	Lifetime Residential Warranty 5 Year Light Commercial

*See full warranty at LWFlooring.com







T-Molding



Threshold



Reducer


Flush
Stairnose

Quarter
Round

Molding Specifications

Profile	W1	W2	W3	T1	T2	T3	Length	Weight
-	Width	-	-	Height	-	-	-	Lbs
T-Molding	1-7/8"	1/2"	11/16"	5/8"	-	-	78"	1.7 - 2.7
Threshold	2"	7/8"	-	3/4"	3/8"	-	78"	1.7 - 2.7
Reducer	2"	-	-	1/2"	1/8"	-	78"	1.7 - 2.7
Flush Stairnose	3"	1-4/5"	-	3/4"	1/4"	1/2"	78"	2.7
Quarter Round	3/4"	-	-	3/4"	-	-	78"	1.7

Item Code

Color	T-Molding	Threshold	Reducer	Flush Stairnose	Quarter Round
Amarone	AH12ATM	AH12ATH	AH12ARD	AH12ASN	-
Brunello	SVWO12BRTM	SVWO12BRTH	SVWO12BRRD	SVWO12BRSN	-
Cabernet	AH12CATM	AH12CATH	AH12CARD	AH12CASN	AH12CAQR
Chardonnay	EWO12CHTM	EWO12CHTH	EWO12CHRD	EWO12CHSN	EWOMQR
Godello	SVWO12GOTM	SVWO12GOTH	SVWO12GORD	SVWO12GOSN	-
Grenache	SVWO12GRTM	SVWO12GRTH	SVWO12GRRD	SVWO12GRSN	RWO15RQR
Hermitage	AH12HTM	AH12HTH	AH12HRD	AH12HSN	-
Ives	AH12ITM	AH12ITH	AH12IRD	AH12ISN	-
Madeira	EWO14VTM	EWO12MDTH	EWO12MDRD	EWO12MDSN	EWOVQR
Merlot	AH12METM	AH12METH	AH12MERD	AH12MESN	AH12MEQR
Port	AW12NTM	AW12NTH	AW12NRD	AW12NSN	-
Rossara	SVWO12ROTM	SVWO12ROTH	SVWO12RORD	SVWO12ROSN	-
Sherry	AH12SHTM	AH12SHTH	AH12SHRD	AH12SHSN	AH12SHQR
Syrah	SVWO12SYTM	SVWO12SYTH	SVWO12SYRD	SVWO12SYSN	-
Tokaji	AH12TTM	AH12TTH	AH12TRD	AH12TSN	AH12TQR



Our French Impressions Collection features European White Oak veneers that are on planks 7" W x 3/8" thick and lengths up to 71" in size. Offered in today's most sought after design colors, French Impressions showcases a gentle wire-brushed finish that values simplicity over excess. This collection is a striking canvas of modern beauty for your home for years to come.



Andrique
FIWO10AN7



Bazille
FIWO10BA7



Cezanne
FIWO10C7



Degas
FIWO10D7



Gauguin
FIWO10GA7



Luna
FIWO10L7



Monet
FIWO10M7



Ottin
FIWO10OT7



Pissarro
FIWO10P7



Renoir
FIWO10R7



Signac
FIWO10S7




Van Gogh
FIWO10V7


FACT SHEET

Specifications	
Size	3/8" x 7" x RL up to 71"
Species	European White Oak
Finish	Polyurethane with Aluminum Oxide
Surface	Wirebrushed
Edge Treatment	Micro-Bevel
Face Veneer	Slice Face
Color Variation	Low - Degas Medium - Cezanne, Monet, Renoir, Signac High - Andrique, Bazille, Gauguin, Luna, Ottin, Pissaro, Van Gogh
Light Sensitivity	Low
Gloss Level	5-8
Certification	Lacey Act & Carb II Compliant
Installation *(on, above, or below grade)	Glue Down, Nail
Milling	Tongue and Groove
Packaging	34.49 sq/ft per carton 1552.05 sq/ft per pallet (Palermo 1250) 45 cartons per pallet
Warranty	Lifetime Residential Warranty 5 Year Light Commercial


*See full warranty at LWFlooring.com



T-Molding



Threshold



Reducer


Flush
Stairnose

Molding Specifications								
Profile	W1 Width	W2	W3	T1 Height	T2	T3	Length	Weight Lbs
T-Molding	1-7/8"	1/2"	11/16"	5/8"	-	-	78"	1.7
Threshold	2"	7/8"	-	3/4"	1/2"	-	78"	1.7
Reducer	1-9/16"	-	-	3/8"	1/8"	-	78"	1.7
Flush Stairnose	2-3/8"	1-7/8"	-	13/16"	7/16"	3/8"	78"	1.7

Item Code				
Color	T-Molding	Threshold	Reducer	Flush Stairnose
Andrique	FIWO10ANTM	FIWO10ANTH	FIWO10ANRD	FIWO10ANSN
Bazille	FIWO10BATM	FIWO10BATH	FIWO10BARD	FIWO10BASN
Cezanne	FIWO10CTM	FIWO10CTH	FIWO10CRD	FIWO10CSN
Degas	FIWO10DTM	FIWO10DTH	FIWO10DRD	FIWO10DSN
Gauguin	FIWO10GATM	FIWO10GATH	FIWO10GARD	FIWO10GASN
Luna	FIWO10LTM	FIWO10LTH	FIWO10LRD	FIWO10LSN
Monet	FIWO10MTM	FIWO10MTH	FIWO10MRD	FIWO10MSN
Ottin	FIWO10OTTM	FIWO10OTTH	FIWO10OTRD	FIWO10OTSN
Pissarro	FIWO10PTM	FIWO10PTH	FIWO10PRD	FIWO10PSN
Renoir	FIWO10RTM	FIWO10RTH	FIWO10RRD	FIWO10RSN
Signac	FIWO10STM	FIWO10STH	FIWO10SRD	FIWO10SSN
Van Gogh	FIWO10VTM	FIWO10VTH	FIWO10VRD	FIWO10VSN





The Traditions Collection is a nostalgic line-up of handscraped and smooth finished Acacia, American Hickory and European White Oak wood species. Unmistakably rich in color and texture, Traditions is full of character with a heritage of style giving each floor its own distinct personality.



Dawn
HSAC10D5



Moonlight
HSAC10M5



Natural Acacia
HSAC10N5



Autumn Brown
HSAH12AB5




Bronze
HSAH10B5



Caramel Cream
TCAH12CC7



Chestnut
HSAH10C5



Honey Mango
TCAH12HM7



Java
HSAH10J5




Toasted Almond
TCAH12TA7



Toffee
HSAH10T5



Wild Blackberry
TCAH12WB7



Latte
TCWO10L5



Praline
TCWO10P5



Riviera
TCWO10R5

FACT SHEET


Specifications					
Color	Size	Sq/ft per Carton	Sq/ft per Pallet	Ctns. per Pallet	Installation
Autumn Brown	1/2" x 5" x RL up to 47-1/4"	32.80	1049.60	32	Float, Glue, Nail
Bronze	3/8" x 5" x RL up to 47-1/4"	32.80	1049.60	32	Glue, Nail
Caramel Cream	1/2" x 6-1/2" x RL up to 74-4/5"	33.94	1,425.48	42	Float, Glue, Nail
Chestnut	3/8" x 5" x RL up to 47-1/4"	32.80	1049.60	32	Glue, Nail
Dawn	3/8" x 5" x RL up to 47-1/4"	34.45	1653.60	48	Glue, Nail
Honey Mango	1/2" x 6-1/2" x RL up to 74-4/5"	33.94	1,425.48	42	Float, Glue, Nail
Java	3/8" x 5" x RL up to 47-1/4"	32.80	1049.60	32	Glue, Nail
Latte	3/8" x 5" x RL up to 70-7/8"	34.45	1653.60	48	Float, Glue, Nail
Moonlight	3/8" x 5" x RL up to 47-1/4"	34.45	1653.60	48	Glue, Nail
Natural Acacia	3/8" x 5" x RL up to 47-1/4"	34.45	1653.60	48	Glue, Nail
Praline	3/8" x 5" x RL up to 70-7/8"	34.45	1653.60	48	Float, Glue, Nail
Riviera	3/8" x 5" x RL up to 70-7/8"	34.45	1653.60	48	Float, Glue, Nail
Toasted Almond	1/2" x 6-1/2" x RL up to 74-4/5"	33.94	1,425.48	42	Float, Glue, Nail
Toffee	3/8" x 5" x RL up to 47-1/4"	32.80	1049.60	32	Glue, Nail
Wild Blackberry	1/2" x 6-1/2" x RL up to 74-4/5"	33.94	1,425.48	42	Float, Glue, Nail

Color	Species	Gloss Level	Face Veneer	Color Variation	Edge Treatment
Autumn Brown	American Hickory	9-15	Rotary	Medium	Micro-Bevel
Bronze	American Hickory	10-15	Rotary	Medium	Micro-Bevel
Caramel Cream	American Hickory	10-15	Slice Face	Medium	Beveled
Chestnut	American Hickory	10-15	Rotary	Medium	Micro-Bevel
Dawn	Acacia	15-20	Slice Face	Medium	Micro-Bevel
Honey Mango	American Hickory	10-15	Slice Face	High	Beveled
Java	American Hickory	10-15	Rotary	Medium	Micro-Bevel
Latte	European White Oak	5-8	Slice Face	Low	Micro-Bevel
Moonlight	Acacia	15-20	Slice Face	Medium	Micro-Bevel
Natural Acacia	Acacia	15-20	Slice Face	High	Micro-Bevel
Praline	European White Oak	5-8	Slice Face	Low	Micro-Bevel
Riviera	European White Oak	5-8	Slice Face	Low	Micro-Bevel
Toasted Almond	American Hickory	10-15	Slice Face	Medium	Beveled
Toffee	American Hickory	9-15	Rotary	Medium	Micro-Bevel
Wild Blackberry	American Hickory	10-15	Slice Face	Low	Beveled


Finish	Polyurethane with Aluminum Oxide
Surface	Handscraped
Certification	Lacey Act & Carb II Compliant
Light Sensitivity	Low
Milling	Tongue and Groove
Warranty	Lifetime Residential Warranty 5 Year Light Commercial

*See full warranty at LWFlooring.com







T-Molding							
Color	Item Code	W1 Width	T1 Height	W2	W3	Length	Weight Lbs
Autumn Brown	AH12ABTM	1-7/8"	5/8"	1/2"	11/16"	78"	1.7
Bronze	AH10BTM	1-7/8"	5/8"	1/2"	11/16"	78"	1.7
Caramel Cream	AH12CCTM	1-7/8"	5/8"	1/2"	11/16"	78"	1.7
Chestnut	AH10CTM	1-7/8"	5/8"	1/2"	11/16"	78"	1.7
Dawn	AC10DTM	1-3/4"	1/2"	1/2"	5/8"	72"	1.7
Honey Mango	AH12HMTM	1-7/8"	5/8"	1/2"	11/16"	78"	1.7
Java	AH10JTM	1-7/8"	5/8"	1/2"	11/16"	78"	1.7
Latte	TCWO10LTM	1-7/8"	5/8"	1/2"	11/16"	78"	1.7
Moonlight	AC10MTM	1-3/4"	1/2"	1/2"	5/8"	72"	1.7
Acacia Natural	AC10NTM	1-3/4"	1/2"	1/2"	5/8"	72"	1.7
Praline	TCWO10PTM	1-7/8"	5/8"	1/2"	11/16"	78"	1.7
Riviera	TCWO10RTM	1-7/8"	5/8"	1/2"	11/16"	78"	1.7
Toasted Almond	AH12TATM	1-7/8"	5/8"	1/2"	11/16"	78"	1.7
Toffee	AH10TTM	1-7/8"	5/8"	1/2"	11/16"	78"	1.7
Wild Blackberry	AH12WBTM	1-7/8"	5/8"	1/2"	11/16"	78"	1.7




Threshold							
Color	Item Code	W1 Width	T1 Height	W2	T2	Length	Weight Lbs
Autumn Brown	AH12ABTH	2"	3/4"	7/8"	3/8"	78"	2.7
Bronze	AH10BTH	2"	3/4"	7/8"	3/8"	78"	2.7
Caramel Cream	AH12CCTH	2"	3/4"	7/8"	3/8"	78"	1.7
Chestnut	AH10CTH	2"	3/4"	7/8"	3/8"	78"	2.7
Dawn	AC10DTH	1-3/4"	3/4"	11/16"	3/8"	72"	2.7
Honey Mango	AH12HMTTH	2"	3/4"	7/8"	3/8"	78"	1.7
Java	AH10JTH	2"	3/4"	7/8"	3/8"	78"	2.7
Latte	TCWO10LTH	2"	3/4"	7/8"	3/8"	78"	1.7
Moonlight	AC10MTH	1-3/4"	3/4"	11/16"	3/8"	72"	2.7
Acacia Natural	AC10NTH	1-3/4"	3/4"	11/16"	3/8"	72"	2.7
Praline	TCWO10PTH	2"	3/4"	7/8"	3/8"	78"	1.7
Riviera	TCWO10RTH	2"	3/4"	7/8"	3/8"	78"	1.7
Toasted Almond	AH12TATH	2"	3/4"	7/8"	3/8"	78"	1.7
Toffee	AH10TTH	2"	3/4"	7/8"	3/8"	78"	2.7
Wild Blackberry	AH12WBTH	2"	3/4"	7/8"	3/8"	78"	1.7



Reducer						
Color	Item Code	W1 Width	T1 Height	T2	Length	Weight Lbs
Autumn Brown	AH12ABRD	2"	1/2"	1/8"	78"	1.7
Bronze	AH10BRD	1-9/16"	3/8"	1/8"	78"	1.7
Caramel Cream	AH12CCRD	2"	1/2"	1/8"	78"	1.7
Chestnut	AH10CRD	1-9/16"	3/8"	1/8"	78"	1.7
Dawn	AC10DRD	1-3/4"	3/8"	1/8"	72"	1.7
Honey Mango	AH12HMRD	2"	1/2"	1/8"	78"	1.7
Java	AH10JRD	1-9/16"	3/8"	1/8"	78"	1.7
Latte	TCWO10LRD	1-1/2"	3/8"	1/8"	78"	1.7
Moonlight	AC10MRD	1-3/4"	3/8"	1/8"	72"	1.7
Acacia Natural	AC10NRD	1-3/4"	3/8"	1/8"	72"	1.7
Praline	TCWO10PRD	1-1/2"	3/8"	1/8"	78"	1.7
Riviera	TCWO10RRD	1-1/2"	3/8"	1/8"	78"	1.7
Toasted Almond	AH12TARD	2"	1/2"	1/8"	78"	1.7
Toffee	AH10TRD	1-9/16"	3/8"	1/8"	78"	1.7
Wild Blackberry	AH12WBRD	2"	1/2"	1/8"	78"	1.7



Flush Stairnose								
Color	Item Code	W1 Width	W2	T1 Height	T2	T3	Length	Weight Lbs
Autumn Brown	AH12ABSN	3"	1-4/5"	3/4"	1/4"	1/2"	78"	2.7
Bronze	AH10BSN	2-3/8"	1-7/8"	13/16"	7/16"	3/8"	78"	2.7
Caramel Cream	AH12CCSN	3"	1-4/5"	3/4"	1/4"	1/2"	78"	1.7
Chestnut	AH10CSN	2-3/8"	1-7/8"	13/16"	7/16"	3/8"	78"	2.7
Dawn	AC10DSN	3-1/2"	1-7/8"	3/4"	5/16"	3/8"	72"	2.7
Honey Mango	AH12HMSN	3"	1-4/5"	3/4"	1/4"	1/2"	78"	1.7
Java	AH10JSN	2-3/8"	1-7/8"	13/16"	7/16"	3/8"	78"	2.7
Latte	TCWO10LSN	2-3/8"	1-7/8"	13/16"	7/16"	3/8"	78"	1.7
Moonlight	AC10MSN	3-1/2"	1-7/8"	3/4"	5/16"	3/8"	72"	2.7
Acacia Natural	AC10NSN	3-1/2"	1-7/8"	3/4"	5/16"	3/8"	72"	2.7
Praline	TCWO10PSN	2-3/8"	1-7/8"	13/16"	7/16"	3/8"	78"	1.7
Riviera	TCWO10RSN	2-3/8"	1-7/8"	13/16"	7/16"	3/8"	78"	1.7
Toasted Almond	AH12TASN	3"	1-4/5"	3/4"	1/4"	1/2"	78"	1.7
Toffee	AH10TSN	2-3/8"	1-7/8"	13/16"	7/16"	3/8"	78"	2.7
Wild Blackberry	AH12WBSN	3"	1-4/5"	3/4"	1/4"	1/2"	78"	1.7



Quarter Round					
Color	Item Code	W1 Width	T1 Height	Length	Weight Lbs
Autumn Brown	AHABQR	3/4"	3/4"	78"	1.7
Bronze	AHBQR	3/4"	3/4"	78"	1.7
Caramel Cream	AH12CCQR	3/4"	3/4"	78"	1.7
Chestnut	AH10CQR	3/4"	3/4"	78"	1.7
Dawn	ACGTQR	3/4"	3/4"	78"	1.7
Honey Mango	AHNQR	3/4"	3/4"	78"	1.7
Java	AH10JQR	3/4"	3/4"	78"	1.7
Moonlight	ACNHQR	3/4"	3/4"	78"	1.7
Acacia Natural	ACNQR	3/4"	3/4"	78"	1.7
Toasted Almond	AH12TAQR	3/4"	3/4"	78"	1.7
Toffee	AH12SHQR	3/4"	3/4"	78"	1.7
Wild Blackberry	AH12WBQR	3/4"	3/4"	78"	1.7



WATERPROOF FLOORING



LW Flooring is proud to present our full line of waterproof flooring which are not only durable and pet friendly, but also inspire your creativity and imagination.

SAPPHIRE WAVE
RIVERSTONE COLLECTION | SPC5SW7



Featuring stunning Embossed In Register detailing and a resilient 30-mil wear layer on substantial 9" x 72" planks, this collection captures a high-end, seamless look and feel that embodies strength, scale and sophistication.



Cannon Beach
GC12CB9



Del Mar
GC12DM9




Eastport
GC12EA9



Friday Harbor
GC12FH9




Gold Coast
GC12GC9

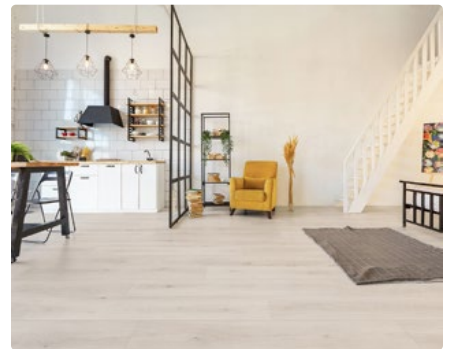

Half Moon Bay
GC12HM9



Port Royal
GC12PR9

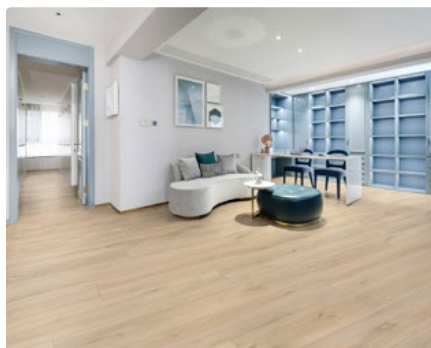


Sanibel
GC12SA9


FACT SHEET

Specifications	
Size	12mm x 9" x 72"
Wear Layer	30 mil
Finish	Polyurethane
Surface	Embossed in Register
Edge Treatment	Painted Beveled
Attached Cushion	Yes
Color Variation	Medium
Light Sensitivity	Low
Installation *(on, above, or below grade)	5G Locking System
Milling	Tongue and Groove
Packaging	17.73 sq/ft per carton 1,063.80 sq/ft per pallet 60 cartons per pallet
Warranty	Lifetime Residential Warranty 15 Year Light Commercial

*See full warranty at LWFlooring.com






T-Molding



Threshold



Reducer


Flush
Stairnose

Multi
Stairnose

Stair Tread
Round Nose

Molding Specifications								
Profile	W1	W2	W3	T1	T2	T3	Length	Weight
-	Width	-	-	Height	-	-	-	Lbs
T-Molding	1-3/4"	3/8"	11/16"	9/16"	-	-	92"	1.39
Threshold	1-3/8"	3/8"	-	9/16"	7/16"	-	92"	1.59
Reducer	1-3/4"	-	-	9/16"	7/16"	-	92"	1.76
Flush Stairnose	4-7/16"	3-13/16"	-	1"	9/16"	12mm	92"	5.7
Multi Stairnose	2"	-	-	1"	-	1/16"	92"	5.7
Stair Tread Round Nose	12"	-	-	1-3/16"	7/8"	5/16"	47-1/4"	7.28

Item Code						
Color	T-Molding	Threshold	Reducer	Flush Stairnose	Multi Stairnose	Stair Tread Round Nose
Cannon Beach	GC12CBTM	GC12CBTH	GC12CBRD	GC12CBSN	GC12CBMSN	GC12CBSTR
Del Mar	GC12DMTM	GC12DMTH	GC12DMRD	GC12DMSN	GC12DMMSN	GC12DMSTR
Eastport	GC12EATM	GC12EATH	GC12EARD	GC12EASN	GC12EAMSN	GC12EASTR
Friday Harbor	GC12FHTM	GC12FHTH	GC12FHRD	GC12FHSN	GC12FHMSN	GC12FHSTR
Gold Coast	GC12GCTM	GC12GCTH	GC12GCRD	GC12GCSN	GC12GCMSN	GC12GCSTR
Half Moon Bay	GC12HMTM	GC12HMTH	GC12HMRD	GC12HMSN	GC12HMMSN	GC12HMSTR
Port Royal	GC12PRTM	GC12PRTH	GC12PRRD	GC12PRSN	GC12PRMSN	GC12PRSTR
Sanibel	GC12SATM	GC12SATH	GC12SARD	GC12SASN	GC12SAMSN	GC12SASTR





The Riverside Collection combines the durability of vinyl with the beauty of today's contemporary and rustic hardwood floor visuals. Completely waterproof, low-maintenance, pet friendly, scratch & dent resistant, and long lasting this highly durable 20 mil wear layer LVP performs day-in and day-out all while maintaining its incredible look and feel. Easy to install and the performance you expect in LVP, Riverside is the right combination that everyday life demands in a flooring solution.



Anise
EVP7AN9



Buttercup
EVP7BU9



Cattail
EVP7CA9



Chamomile
EVP7CH9



Foxglove
EVP7FO9



Goldenrod
EVP7GO9



Marigold
EVP7MA9



Orchid
EVP7OR9



Papyrus
EVP7PP9



Primrose
EVP7PR9



Wisteria
EVP7WS9



Zinnia
EVP7ZI9

FACT SHEET

Testing		
Critical Radiant Flux	ASTM E648	Class I
Surface Flammability	DOC FF 1-70	Passed
Coefficient of Friction	ASTM 2047	Passed >0.6
Static Load Limit	ASTM F970	Exceeds 3000 lbs (No cushion)
STC Sound Testing*	ASTM E492	71
IIC Sound Testing*	ASTM E989	73
*Sound testing will vary depending upon floor/ceiling assembly		
Floor Score Certified		
Phthalate Free		
PVC	100% Virgin PVC	

Size & Packaging Per Color				
Color	Size	Pcs. per Carton	Sq/ft per Carton	Ctns. per Pallet
Anise	7.8mm x 9" x 59"	8 pcs (50.19 lbs)	29.27	52
Buttercup	7.8mm x 9" x 59"	8 pcs (50.59 lbs)	29.27	52
Cattail	7.8mm x 9-3/8" x 60"	8 pcs (52.01 lbs)	31.19	52
Chamomile	7.8mm x 9" x 59"	8 pcs (50.59 lbs)	29.27	52
Foxglove	7.8mm x 9" x 59"	8 pcs (50.59 lbs)	29.27	52
Goldenrod	8.0mm x 9" x 70"	6 pcs (46.29 lbs)	26.51	52
Marigold	7.8mm x 9" x 59"	8 pcs (49.81 lbs)	29.27	52
Orchid	8.0mm x 9" x 70"	6 pcs (46.29 lbs)	26.51	52
Papyrus	7.8mm x 9" x 59"	8 pcs (50.19 lbs)	29.27	52
Primrose	8.0mm x 9" x 70"	6 pcs (46.29 lbs)	26.51	52
Wisteria	7.8mm x 9-3/8" x 60"	8 pcs (52.01 lbs)	31.19	52
Zinnia	7.8mm x 9" x 59"	8 pcs (50.19 lbs)	29.27	52

Specifications	
Wear Layer	20 mil
Finish	Polyurethane
Surface	Embossed in Register
Edge Treatment	Painted Beveled Micro-Beveled (Anise, Marigold, Papyrus, Wisteria)
Attached Cushion	1.5mm Cork Backing
Installation *(on, above, or below grade)	Drop Lock, Click Floating Floor
Warranty	Lifetime Waterproof Lifetime Residential Wear 15 Year Light Commercial
*See full warranty at LWFlooring.com	






T-Molding




Threshold



Reducer


Flush
Stairnose

Overlap
Stairnose

Stair Tread
Round Nose

Molding Specifications

Profile	W1	W2	W3	T1	T2	T3	Length	Weight
-	Width	-	-	Height	-	-	-	Lbs
T-Molding	1-3/4"	3/8"	11/16"	3/8"	-	-	92"	2.7
Threshold	1-3/8"	3/8"	-	3/8"	1/4"	-	92"	2.7
Reducer	1-3/4"	-	-	3/8"	5/16"	-	92"	2.7
Flush Stairnose	4-5/16"	3-13/16"	-	1"	11/16"	7.8 - 8mm	92"	2.7
Overlap Stairnose	2-1/16"	-	-	11/16"	-	5/16"	92"	5.7
Stair Tread Round Nose	12"	-	-	1-1/5"	7/8"	5/16"	47-1/4"	7.17

Item Code

Color	T-Molding	Threshold	Reducer	Flush Stairnose	Overlap Stairnose	Stair Tread Round Nose
Anise	EVP7ANTM	EVP7ANTH	EVP7ANRD	EVP7ANSNF	EVP7ANSNO	EVP7ANSTR
Buttercup	EVP7BUTM	EVP7BUTH	EVP7BURD	EVP7BUSN	EVP7BUSNO	EVP7BUSTR
Cattail	EVP7CATM	EVP7CATH	EVP7CARD	EVP7CASN	EVP7CASNO	EVP7CASTR
Chamomile	EVP7CHTM	EVP7CHTH	EVP7CHRD	EVP7CHSN	EVP7CHSNO	EVP7CHSTR
Foxglove	EVP7FOTM	EVP7FOTH	EVP7FORD	EVP7FOSN	EVP7FOSNO	EVP7FOSTR
Goldenrod	EVP7GOTM	EVP7GOTH	EVP7GORD	EVP7GOSN	EVP7GOSNO	EVP7GOSTR
Marigold	EVP7MATM	EVP7MATH	EVP7MARD	EVP7MASN	EVP7MASNO	EVP7MASTR
Orchid	EVP7ORTM	EVP7ORTH	EVP7ORRD	EVP7ORSN	EVP7ORSNO	EVP7ORSTR
Papyrus	EVP7PPTM	EVP7PPTH	EVP7PPRD	EVP7PPSNF	EVP7PPSNO	EVP7PPSTR
Primrose	EVP7PRTM	EVP7PRTH	EVP7PRRD	EVP7PRSNF	EVP7PRSNO	EVP7PRSTR
Wisteria	EVP7WSTM	EVP7WSTH	EVP7WSRD	EVP7WSSNF	EVP7WSSNO	EVP7WSSTR
Zinnia	EVP7ZITM	EVP7ZITH	EVP7ZIRD	EVP7ZISN	EVP7ZISNO	EVP7ZISTR



The Riverstone RCV Collection features a 20 mil wear layer, 5.5 mm overall thickness, 100% virgin PVC construction, eco-friendly, low maintenance, long-lasting, waterproof, pet friendly option in vinyl flooring. Stunning Embossed-In-Register (EIR) wood aesthetics, a rich distinct color palette, true-to-life textures all combine to bring the look and feel of nature indoors. Riverstone represents both the luxury and craftsmanship you expect in a Rigid Core Vinyl (RCV) floor.



Amber Tide
SPC5AT7



Amethyst Cove
SPC5AC7



Citrine Oasis
SPC5CO7



Garnet Bay
SPC5GB7



Havana
SPC5HA7



Moonstone Creek
SPC5MC7



Navajo
SPC5NA7



Peridot Drift
SPC5PD7



Ruby Splash
SPC5RS7K



Sapphire Wave
SPC5SW7



Topaz Lagoon
SPC5TL7




Vista
SPC5VT7

FACT SHEET


Testing		
Critical Radiant Flux	ASTM E648	Class I
Surface Flammability	DOC FF 1-70	Passed
Coefficient of Friction	ASTM 2047	Passed >0.6
Static Load Limit	ASTM F970	Exceeds 3000 lbs (No cushion)
STC Sound Testing*	ASTM E492	68
IIC Sound Testing*	ASTM E989	70
*Sound testing will vary depending upon floor/ceiling assembly		
Floor Score Certified		
Phthalate Free		
PVC	100% Virgin PVC	

Specifications	
Size	5.5mm x 7" x 60" 5.5mm x 7" x 48" (Amethyst Cove & Moonstone Creek)
Wear Layer	20 mil
Finish	Polyurethane
Surface	Embossed in Register
Edge Treatment	Four-Side Painted Bevel
Attached Cushion	1.5mm EVA Backing
Installation *(on, above, or below grade)	Click Lock, Click Floating Floor
Packaging	23.32 - 23.37 sq/ft per carton 1,399.2 - 1,515.8 sq/ft per pallet 60 - 65 cartons per pallet
Warranty	Lifetime Waterproof Lifetime Residential Wear 15 Year Light Commercial
*See full warranty at LWFlooring.com	






T-Molding




Threshold



Reducer


 Flush
Stairnose

 Overlap
Stairnose

 Stair Tread
Round Nose

 Stair Tread
Square Nose

Molding Specifications

Profile	W1 Width	W2	W3	W5	T1 Height	T2	T3	Length	Weight Lbs
T-Molding	1-3/4"	3/8"	11/16"	-	3/8"	-	-	92"	2.7
Threshold	1-3/8"	3/8"	-	-	3/8"	1/4"	-	92"	2.7
Reducer	1-3/4"	-	-	-	3/8"	5/16"	-	92"	2.7
Flush Stairnose	4-5/16"	3-13/16"	-	-	1"	11/16"	7.8 - 8mm	92"	2.7
Overlap Stairnose	2-1/16"	-	-	-	11/16"	-	5/16"	92"	5.7
Stair Tread Round Nose	12"	-	-	-	1-1/5"	7/8"	5/16"	47-1/4"	7.17
Stair Tread Square Nose	11-13/16"	-	-	1/2"	1-1/2"	-	1/4"	48"	12.5

Item Code

Color	T-Molding	Threshold	Reducer	Flush Stairnose	Overlap Stairnose	Stair Tread Round Nose	Stair Tread Square Nose
Amber Tide	SPC5ATTM	SPC5ATTH	SPC5ATRD	SPC5ATSNO	SPC5ATSNO	SPC5ATSTR	-
Amethyst Cove	SPC5ACTM	SPC5ACTH	SPC5ACRD	SPC5ACSNF	SPC5ACSNO	SPC5ACSTR	SPC5ACST
Citrine Oasis	SPC5COTM	SPC5COTH	SPC5CORD	SPC5COSNF	SPC5COSNO	SPC5COSTR	-
Garnet Bay	SPC5GBTM	SPC5GBTH	SPC5GBRD	SPC5GBSNF	SPC5GBSNO	SPC5GBSTR	SPC5GBST
Havana	SPC5HATM	SPC5HATH	SPC5HARD	SPC5HASNF	SPC5HASNO	SPC5HASTR	-
Moonstone Creek	SPC5MCTM	SPC5MCTH	SPC5MCRD	SPC5MCSNF	SPC5MCSNO	SPC5MCSTR	SPC5MCST
Navajo	SPC5NATM	SPC5NATH	SPC5NARD	SPC5NASNF	SPC5NASNO	SPC5NASTR	-
Peridot Drift	SPC5PDTM	SPC5PDTH	SPC5PDRD	SPC5PDSNF	SPC5PDSNO	SPC5PDSTR	SPC5PDST
Ruby Splash	SPC5RSTM	SPC5RSTH	SPC5RSRD	SPC5RSSNF	SPC5RSSNO	SPC5RSSTR	SPC5RSST
Sapphire Wave	SPC5SWTM	SPC5SWTH	SPC5SWRD	SPC5WSNF	SPC5WSNO	SPC5SWSTR	SPC5SWST
Topaz Lagoon	SPC5TLTM	SPC5TLTH	SPC5TLRD	SPC5TLSNF	SPC5TLSNO	SPC5TLSTR	-
Vista	SPC5VTM	SPC5VTTH	SPC5VTRD	SPC5VTSNF	SPC5VTSNO	SPC5VTSTR	-



The Lakeview RCV Collection gives you everything you need in real hardwood looks and natural colors all with the durability and performance of a true rigid core vinyl floor. Featuring a 20 mil wear layer, the latest in sought-after hardwood visuals and designer style colors, this Embossed RCV is waterproof, pet friendly, low maintenance, FloorScore Certified, and sensible all while continuing to bring the look and feel of timeless hardwood to any space in your home.



Bayfield
SPC4BA7



Breaux Bridge
SPC4BB7



Champlain
SPC4CP7



Hartwell
SPC4HA7



Lochloosa
SPC4LL7



Mackinac Island
SPC4MI7



Marble Falls
SPC4MF7



Sandpoint
SPC4SP7



Victoria
SPC4VI7



Yellowstone
SPC4YS7

FACT SHEET

Testing		
Critical Radiant Flux	ASTM E648	Class I
Surface Flammability	DOC FF 1-70	Passed
Coefficient of Friction	ASTM 2047	Passed >0.6
Static Load Limit	ASTM F970	Exceeds 3000 lbs (No cushion)
STC Sound Testing*	ASTM E492	71
IIC Sound Testing*	ASTM E989	71
*Sound testing will vary depending upon floor/ceiling assembly		
Floor Score Certified		
Phthalate Free		
PVC	100% Virgin PVC	

Specifications	
Size	5.0mm x 7" x 48" Nominal
Wear Layer	20 mil
Finish	Polyurethane
Surface	Embossed
Edge Treatment	Four-Side Micro Bevel
Attached Cushion	1.0mm EVA Backing
Installation *(on, above, or below grade)	Click Lock, Click Floating Floor
Packaging	23.67 sq/ft per carton 1,420.20 sq/ft per pallet 60 cartons per pallet
Warranty	Lifetime Waterproof Lifetime Residential Wear 15 Year Light Commercial Wear
*See full warranty at LWFlooring.com	






T-Molding



Threshold



Reducer


Flush
Stairnose

Stair Tread
Round Nose

Molding Specifications


Profile	W1	W2	W3	T1	T2	T3	Length	Weight
-	Width	-	-	Height	-	-	-	Lbs
T-Molding	1-3/4"	3/8"	11/16"	3/8"	-	-	92"	2.7
Threshold	1-3/8"	3/8"	-	3/8"	3/16"	-	92"	2.7
Reducer	1-3/4"	-	-	3/8"	3/16"	-	92"	2.7
Flush Stairnose	4-5/16"	3-13/16"	-	1"	13/16"	5mm	92"	5.5
Stair Tread Round Nose	12"	-	-	1-1/5"	7/8"	5/16"	47-1/4"	7.17

Item Code

Color	T-Molding	Threshold	Reducer	Flush Stairnose	Stair Tread Round Nose
Bayfield	SPC4BATM	SPC4BATH	SPC4BARD	SPC4BASN	SPC4BASTR
Breaux Bridge	SPC4BBTM	SPC4BBTH	SPC4BBRD	SPC4BBSN	SPC4BBSTR
Champlain	SPC4CPTM	SPC4CPTH	SPC4CPRD	SPC4CPSN	SPC4CPSTR
Hartwell	SPC4HATM	SPC4HATH	SPC4HARD	SPC4HASN	SPC4HASTR
Lochloosa	SPC4LLTM	SPC4LLTH	SPC4LLRD	SPC4LLSN	SPC4LLSTR
Mackinac Island	SPC4MITM	SPC4MITH	SPC4MIRD	SPC4MISN	SPC4MISTR
Marble Falls	SPC4MFTM	SPC4MFTH	SPC4MFRD	SPC4MFSN	SPC4MFSTR
Sandpoint	SPC4SPTM	SPC4SPTH	SPC4SPRD	SPC4SPSN	SPC4SPSTR
Victoria	SPC4VITM	SPC4VITH	SPC4VIRD	SPC4VISN	SPC4VISTR
Yellowstone	SPC4YSTM	SPC4YSTH	SPC4YSRD	SPC4YSSN	SPC4YSSTR



Our fully waterproof loose-lay LVP flooring is as durable as it is beautiful. Utilizing a 20 mil Embossed "Tough as Nails" wearlayer, this easy to install flooring option is perfect for all projects. From the boardroom to the mudroom, the Shires Collection is everything you need in loose-lay LVP.

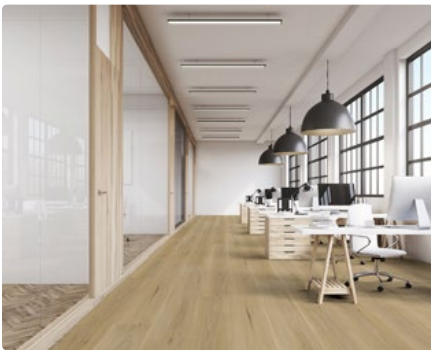

Durham
SC5DU9D



Essex
SC5ES9D



Hampshire
SC5HA9D



Kent
SC5KE9D



Manchester
SC5MA9D



Suffolk
SC5SU9D



Wiltshire
SC5WI9

FACT SHEET

Testing		
Formaldehyde Rating	EN717-1 (California Sec. 01350)	Class E1 (Passed)
Total VOC	California Sec. 01350	Passed (A+)
Fire Rating	Bf1-S1	Passed
Static Load Limit	ASTM F970-07	250 lbf .048mm
Heat Resistance	ASTM F1514-03	0.8
	Floor Score Certified	
	Phthalate Free	
	Fiberglass Enhanced Core	

Specifications	
Size	5mm x 9" x 60"
Wear Layer	20 mil
Finish	Polyurethane
Surface	Embossed
Edge Treatment	Square Edge
Color Variation	Medium
Light Sensitivity	Low
Installation *(on, above, or below grade)	Loose Lay / Glue Down
Packaging	30.04 sq/ft per carton 1,682.24 sq/ft per pallet 56 cartons per pallet
Packaging (Wiltshire)	22.41 sq/ft per carton 1,165.32 sq/ft per pallet 52 cartons per pallet
Warranty	Lifetime Residential Warranty 15 Year Commercial
*See full warranty at LWFlooring.com	





The Metro Luxe Collection combines refined hardwood visuals with durable, water-resistant capabilities on expansive 9"x 60" glue-down planks, balancing urban style with upscale appeal for the ultimate statement in contemporary design.



Astoria
ML2AS9



Broadway
ML2BR9



Gramercy Park
ML2GP9



Staten Island
ML2SI9



Times Square
ML2TS9



West Village
ML2WV9

FACT SHEET

Testing		
IIC Sound Testing*		56
Fire Rating (European Fire Classification)		Class Bfl-S1
Wear Resistance (Rotations)	(EN 649:2011)	1.6 mm ³ /100 revolutions
NALFA Castor Chair (25000 Cycles)		PASS
Peel Resistance (ENISO 24324:2012)	Longitudinal Direction: 95n/50mm	Cross Direction: 90n/50mm
Resistance to Heat (ASTMF1514-03)		ΔE*ab: 0.8
*Sound testing will vary depending upon floor/ceiling assembly		
Floor Score Certified		
Phthalate Free		

Specifications	
Size	2.5mm x 9" x 60"
Wear Layer	20 mil
Finish	Polyurethane
Surface	Embossed (Gramercy - Embossed in Register)
Edge Treatment	Micro Bevel
Architect Folder	S-MLUAFD
Installation *(on, above, or below grade)	Glue Down, Dryback
Packaging	44.88 sq/ft per carton 2,513.28 sq/ft per pallet 56 cartons per pallet
Warranty	Lifetime Residential Warranty 25 Year Commercial
*See full warranty at LWFloors.com	





Modern style meets classic charm with the Uptown Avenue Collection – Featuring realistic hardwood aesthetics on fully water-resistant, 9" x 60" glue-down planks, designed to deliver lasting performance underfoot.



Burlington
UA2BU9



Dover
UA2DO9



Medford
UA2ME9



Nantucket
UA2NA9



Quincy
UA2QU9



Weston
UA2WE9



FACT SHEET

Testing		
IIC Sound Testing*		56
Fire Rating (European Fire Classification)		Class Bfl-S1
Wear Resistance (Rotations)	(EN 649:2011)	1.6 mm ³ /100 revolutions
NALFA Castor Chair (25000 Cycles)		PASS
Peel Resistance (ENISO 24324:2012)	Longitudinal Direction: 95n/50mm	Cross Direction: 90n/50mm
Resistance to Heat (ASTMF1514-03)		ΔE*ab: 0.8
*Sound testing will vary depending upon floor/ceiling assembly		
Floor Score Certified		
Phthalate Free		

Specifications	
Size	2mm x 9" x 60"
Wear Layer	12 mil
Finish	Polyurethane
Surface	Embossed (Medford - Embossed in Register)
Edge Treatment	Micro Bevel
Architect Folder	S-MLUAFD
Installation *(on, above, or below grade)	Glue Down, Dryback
Packaging	56.10 sq/ft per carton 3,141.6 sq/ft per pallet 56 cartons per pallet
Warranty	Lifetime Residential Warranty 25 Year Light Commercial
*See full warranty at LWFlooring.com	





The Township Collection features a fully waterproof vinyl glue down plank that is designed for both residential and multifamily usage. A high impact, registered, and embossed wear layer protects this beautiful wood visual line for years to come.



Georgetown
TS2GE7



Hudson
TS2HU7



Rockport
TS2RO7



Springdale
TS2SP7



Nashville
TS2NA7



Seattle
TS2SE7

FACT SHEET

Testing		
Critical Radiant Flux	ASTM E648	Class I
Surface Flammability	DOC FF 1-70	Passed
Coefficient of Friction	ASTM 2047	Passed >0.6
Static Load Limit	ASTM F970	1300 lbs
STC Sound Testing*	ASTM E90/E413	52
IIC Sound Testing*	ASTM E492/E989	50
*Sound testing will vary depending upon floor/ceiling assembly		
Product Classification	F1700 Class III	Type B
	Floor Score Certified	
	Phthalate Free	
PVC		100% Virgin PVC

Specifications	
Size	2mm x 7-1/4" x 48" Nominal
Wear Layer	8 mil
Finish	Polyurethane UV Matte
Surface	Embossed
Edge Treatment	No Bevel - Square
StrapSet Sample SKU's Only	S-TS2x4 S-TS2x6
Installation *(on, above, or below grade)	Full Spread Adhesive
Packaging	58.05 sq/ft per carton 3,192.75 sq/ft per pallet 55 cartons per pallet
Warranty	20 Year Waterproof 20 Year Residential Wear 10 Year Light Commercial Wear
*See full warranty at LWFlooring.com	





The Montclair Collection pairs innovative waterproof technology with stunning embossed in register features on 14mm-thick planks to offer a seamless balance of beauty, strength and long-term confidence underfoot.



Alps
LMO14AL9



Denali
LMO14DE9



Everest
LMO14EV9



Himalayas
LMO14HI9



Mont Blanc
LMO14MB9



Olympus
LMO14OL9



Rainier
LMO14RA9



Whitney
LMO14WH9


FACT SHEET

Specifications	
Size	14mm x 9-3/8" x 72"
Wear Layer	AC4
Finish	Aluminum Oxide
Surface	Embossed in Register
Edge Treatment	Painted Beveled
Attached Cushion	EVA Pad
Color Variation	Low
Light Sensitivity	Low
Installation *(on, above, or below grade)	Click Lock, Click Floating Floor
IIC Sound Testing	55
Packaging	23.45 SF per carton 1125.60 SF per pallet 48 cartons per pallet
Warranty	Lifetime Residential Warranty 10 Year Light Commercial

*See full warranty at LWFlooring.com




T-Molding




Threshold



Reducer


Flush
Stairnose

Overlap
Stairnose

Stair Tread
Round Nose

Molding Specifications								
Profile	W1	W2	W3	T1	T2	T3	Length	Weight
-	Width	-	-	Height	-	-	-	Lbs
T-Molding	1-3/4"	3/8"	11/16"	1/2"	-	-	92"	1.39
Threshold	1-3/8"	3/8"	-	11/16"	1/2"	-	92"	1.59
Reducer	1-3/4"	-	-	11/16"	1/2"	-	92"	1.76
Flush Stairnose	4-1/3"	3-3/4"	-	1-1/8"	9/16"	14mm	92"	5.7
Overlap Stairnose	2-5/32"	-	-	1"	-	11/16"	92"	5.7
Stair Tread Round Nose	11-13/16"	-	-	1-1/16"	9/16"	1/2"	47-1/4"	7.28

Item Code						
Color	T-Molding	Threshold	Reducer	Flush Stairnose	Overlap Stairnose	Stair Tread Round Nose
Alps	LMO14ALTM	LMO14ALTH	LMO14ALRD	LMO14ALSN	LMO14ALSNO	LMO14ALSTR
Denali	LMO14DETM	LMO14DETH	LMO14DERD	LMO14DESN	LMO14DESNO	LMO14DESTR
Everest	LMO14EVTM	LMO14EVTH	LMO14EVRD	LMO14EVSNO	LMO14EVSNO	LMO14EVSTR
Himalayas	LMO14HITM	LMO14HITH	LMO14HIRD	LMO14HISNO	LMO14HISNO	LMO14HISTR
Mont Blanc	LMO14MBTM	LMO14MBTH	LMO14MBRD	LMO14MBSNO	LMO14MBSNO	LMO14MBSTR
Olympus	LMO14OLTM	LMO14OLTH	LMO14OLRD	LMO14OLSN	LMO14OLSNO	LMO14OLSTR
Rainier	LMO14RATM	LMO14RATH	LMO14RARD	LMO14RASNO	LMO14RASNO	LMO14RASTR
Whitney	LMO14WHTM	LMO14WHTH	LMO14WHRD	LMO14WHSNO	LMO14WHSNO	LMO14WHSTR





LW Flooring is proud to introduce Odyssey, a truly 100% waterproof click lock/floating laminate floor. This collection has unmatched durability and uncompromised wood look visuals.



Avalon
LOD12AL7



Calypso
LOD12CA7



Contessa
LOD12CO7



Expedition
LOD12EX7



Mariposa
LOD12MA7



Nautilus
LOD12NA7



Osprey
LOD12OS7



Resplendent
LOD12RE7



Serendipity
LOD12SE7



Wanderlust
LOD12WA7



Windsor
LOD12WI7



Zodiac
LOD12ZO7

FACT SHEET


Testing		
Thickness Swell	NALFA 3.2	Class 4
Xenon Light Resistance	NALFA 3.3	Class 4
Cleanability/Stain Resistance	NALFA 3.4	Class 4
Floor Score Certified		

Specifications	
Size	12.0 mm x 7-2/3" x 59-3/4"
Wear Layer	AC4
Finish	Aluminum Oxide
Surface	Embossed in Register
Edge Treatment	Four-Sided Painted Enhanced Bevel
Attached Cushion	2.0 mm EVA Cushion
Color Variation	Low
Light Sensitivity	Low
Installation *(on, above, or below grade)	Click Lock, Click Floating Floor
Abrasion Classification:	Melamine with Aluminum Oxide
Packaging	19.08 SF per carton 1,144.80 SF per pallet 60 cartons per pallet
Warranty	Lifetime Residential Wear Lifetime Residential Stain & Fade 15 Year Light Commercial Wear
*See full warranty at LWFFlooring.com	






T-Molding




Threshold



Reducer


Flush
Stairnose

Overlap
Stairnose

Stair Tread
Round Nose

Molding Specifications

Profile	W1 Width	W2	W3	T1 Height	T2	T3	Length	Weight Lbs
T-Molding	1-3/4"	3/8"	11/16"	15/32"	-	-	92"	1.39
Threshold	1-3/8"	3/8"	-	19/32"	1/2"	-	92"	1.59
Reducer	1-3/4"	-	-	19/32"	1/2"	-	92"	1.76
Flush Stairnose	4-1/3"	3-13/16"	-	15/16"	7/16"	12mm	92"	5.7
Overlap Stairnose	2-3/16"	-	-	11/16"	-	-	92"	5.7
Stair Tread Round Nose	11-13/16"	-	-	1-1/16"	9/16"	1/2"	47-1/4"	7.28

Item Code

Color	T-Molding	Threshold	Reducer	Flush Stairnose	Overlap Stairnose	Stair Tread Round Nose
Avalon	LOD12ALTM	LOD12ALTH	LOD12ALRD	LOD12ALSN	LOD12ALSNO	LOD12ALSTR
Calypso	LOD12CATM	LOD12CATH	LOD12CARD	LOD12CASN	LOD12CASNO	LOD12CASTR
Contessa	LOD12COTM	LOD12COTH	LOD12CORD	LOD12COSN	LOD12COSNO	LOD12COSTR
Expedition	LOD12EXTM	LOD12EXTH	LOD12EXRD	LOD12EXSN	LOD12EXSNO	LOD12EXSTR
Mariposa	LOD12MATM	LOD12MATH	LOD12MARD	LOD12MASN	LOD12MASNO	LOD12MASTR
Nautilus	LOD12NATM	LOD12NATH	LOD12NARD	LOD12NASN	LOD12NASNO	LOD12NASTR
Osprey	LOD12OSTM	LOD12OSTH	LOD12OSRD	LOD12OSSN	LOD12OSSNO	LOD12OSSTR
Resplendent	LOD12RETM	LOD12RETH	LOD12RERD	LOD12RESN	LOD12RESNO	LOD12RESTR
Serendipity	LOD12SETM	LOD12SETH	LOD12SERD	LOD12SESN	LOD12SESNO	LOD12SESTR
Wanderlust	LOD12WATM	LOD12WATH	LOD12WARD	LOD12WASN	LOD12WASNO	LOD12WASTR
Windsor	LOD12WITM	LOD12WITH	LOD12WIRD	LOD12WISN	LOD12WISNO	LOD12WISTR
Zodiac	LOD12ZOTM	LOD12ZOTH	LOD12ZORD	LOD12ZOSN	LOD12ZOSNO	LOD12ZOSTR



The Cascades Collection boasts exceptional durability, complete waterproof protection and a timeless, worry-free style for any room in your home.



Abbott
LCA10AB7



Bowstring
LCA10BO7



Emory
LCA10EM7



Idlewild
LCA10ID7



Lafayette
LCA10LA7



Northshore
LCA10NO7



Pemberton
LCA10PE7




Rainwater
LCA10RA7


FACT SHEET

Specifications	
Size	10mm x 7-2/3" x 59-1/2"
Wear Layer	AC4
Finish	Aluminum Oxide
Surface	Embossed in Register
Edge Treatment	Painted Beveled
Attached Cushion	IXPE Pad
Color Variation	Low
Light Sensitivity	Low
Installation *(on, above, or below grade)	Click Lock, Click Floating Floor
IIC Sound Testing	61
Packaging	25.35 SF per carton 1521.00 SF per pallet 60 cartons per pallet
Warranty	Lifetime Residential Warranty 10 Year Light Commercial

*See full warranty at LWFlooring.com





T-Molding



Threshold



Reducer


Flush
Stairnose

Stair Tread
Round Nose

Molding Specifications								
Profile	W1 Width	W2	W3	T1 Height	T2	T3	Length	Weight Lbs
T-Molding	1-3/4"	3/8"	11/16"	1/2"	-	-	92"	1.39
Threshold	1-3/8"	3/8"	-	1/2"	1/2"	-	92"	1.59
Reducer	1-3/4"	-	-	19/32"	1/2"	-	92"	1.76
Flush Stairnose	4-1/2"	3-13/16"	-	15/16"	7/16"	10mm	92"	5.7
Stair Tread Round Nose	11-13/16"	-	-	1-1/16"	9/16"	1/2"	47-1/4"	7.28

Item Code					
Color	T-Molding	Threshold	Reducer	Flush Stairnose	Stair Tread Round Nose
Abbott	LCA10ABTM	LCA10ABTH	LCA10ABRD	LCA10ABSN	LCA10ABSTR
Bowstring	LCA10BOTM	LCA10BOTH	LCA10BORD	LCA10BOSN	LCA10BOSTR
Emory	LCA10EMTM	LCA10EMTH	LCA10EMRD	LCA10EMSN	LCA10EMSTR
Idlewild	LCA10IDTM	LCA10IDTH	LCA10IDRD	LCA10IDSN	LCA10IDSTR
Lafayette	LCA10LATM	LCA10LATH	LCA10LARD	LCA10LASN	LCA10LASTR
Northshore	LCA10NOTM	LCA10NOTH	LCA10NORD	LCA10NOSN	LCA10NOSTR
Pemberton	LCA10PETM	LCA10PETH	LCA10PERD	LCA10PESN	LCA10PESTR
Rainwater	LCA10RATM	LCA10RATH	LCA10RARD	LCA10RASN	LCA10RASTR





BOSTIK

A Global Leader in Adhesive Technologies

from





LW Flooring is proud to offer industry leading adhesive products to maximize the lifetime and natural beauty of your LW floors. Each adhesive has recommended usages with specific product types, depending on your installation needs.



WOOD P212

Bostik's Wood P212 Bond™ is an easy-to-trowel urethane adhesive and moisture-vapor-control membrane. It provides a flexible and tenacious bond to a variety of surfaces. Bostik Wood P212 Bond™'s elastomeric characteristics allow the adhesive to move with the wood as it expands and contracts over the life of the floor. Bostik's Wood P212 Bond™ exhibits a long open time making installation easier and faster. This adhesive has low VOCs and does NOT contain any water.

Bostik's EFA+™ is an easy-to-trowel urethane adhesive and moisture-control membrane. It provides a flexible and tenacious bond to a variety of surfaces. Bostik's EFA+™ elastomeric characteristics allow the adhesive to move with the wood as it expands and contracts over the life of the floor. Bostik's EFA+™ exhibits a long open time making installation easier and faster. This adhesive has low VOCs and does NOT contain any water.

EFA+



PRO-MSP

Pro-MSP™ is a hardwood and bamboo adhesive and moisture vapor control membrane all in one. This adhesive formulation maintains long term durability and moisture vapor control properties, and it is easy to spread and clean off of prefinished flooring before and after cure. This adhesive has low VOC's (as measured per EPA Method 24) and does NOT contain any water.

LOCK A499 PSA™ is a universal, high-tack, water-based adhesive specifically formulated for the installation of most resilient flooring in residential and commercial applications. LOCK A499 PSA™ is a 0 VOC formulation. LOCK A499 PSA™ flashes off quickly, but has a long working time. It displays tenacious bond strength. LOCK A499 PSA™ has been formulated with exceptional application properties including excellent trowelability, fast tack/grab, low odor, and easy cleanup.

LOCK A499



WOOD P212

CHEMICAL & PHYSICAL PROPERTIES			
Use Environments	Residential	Yes	
	Offices/Light Commercial	Yes	
	Heavy Commercial	Yes	
	Hospital	No	
	Exterior	No	
	Wet Areas	No	
Substrates	Concrete	Yes	
	Plywood	Yes	
	OSB	Yes	
	Recycled Rubber Underlayment	Yes	
	Well-Bonded Vinyl	Yes	
	Terrazzo	Yes	
	Ceramic Tile	Yes	
	Gypsum Underlayments¹	Yes	
	Cement Patch/Underlayment	Yes	
Flooring Types	Solid Hardwood	Yes	
	Engineered Hardwood	Yes	
	Bamboo	Yes	
	Cork	Yes	
	Parquet	Yes	
	Plywood	Yes	
Cured Physical Properties	Cure Time²		
	Light foot traffic	6 to 8 hours	
	Normal foot traffic	8 to 12 hours	
	Water Vapor Permeability³	< 0.9	
	Concrete Moisture Vapor Limits for subfloor moisture vapor protection:		
	For engineered hardwood:		
	ASTM 1869 Calcium Chloride Method	≤ 12 lbs/ 1000 sq ft /24 hrs	
	ASTM 2170 Relative Humidity Test	≤ 85% RH	
	For solid hardwood or bamboo:		
	ASTM 1869 Calcium Chloride Method	≤ 3 lbs/ 1000 sq ft /24 hrs	
	ASTM 2170 Relative Humidity Test	≤ 75% RH	
	Elongation	>180%	
	Service Temperature	-40°F to 150°F (-40°C to 66°C)	
	Application Properties	Ease of Troweling	Easy
Odor		Mild	
Open/Working Time⁴		180 minutes	
Color		Off White	
Density (lbs/gallon)		15.1	
Percentage of Water⁵		0%	
Percentage of Adhesive Coverage Required:		For Moisture-Vapor Protection	For Bond
Engineered		95%	>80%
Solid		95%	>95%
Application Temperature		50°F to 100°F (10°C to 38°C)	
Chemical Properties	Chemistry Type	1-Part Urethane	
	Adhesive Type	Moisture-Vapor Cure	
	VOCs (measured per EPA Method 24)	Yes (<20 g/L)	
	Flash Point, closed cup	145°F (63°C)	
LEED® v4 Contribution	IEQ - Low-Emitting Materials for Interior Adhesives & Sealants	Up to 3 Points⁶	

¹ Dry, above grade
² Humidity affects cure to a greater degree than temperature; the higher the humidity, the faster the cure. Under normal conditions, light foot traffic is acceptable after 6 to 8 hours; normal traffic after 12-16 hours.
³ Per ASTM E-96 Standard Test Methods for Water Vapor Transmission of materials. Ratings are g/m²-24 hour-mmHG.
⁴ Please refer to the Open/Working Time Chart.
⁵ Per ASTM E203-01 Standard Test Method for water using Volumetric Karl Fischer Titration Method. Results rounded to the nearest tenth. Test Method has error range of +/- 0.2%.
⁶ Per LEED® v4 BD+C rating system, taking into account all other interior adhesives & sealants applied on site.

EFA+

CHEMICAL & PHYSICAL PROPERTIES			
Use Environments	Residential	Yes	
	Offices/Light Commercial	Yes	
	Heavy Commercial	Yes	
	Hospital	No	
	Exterior	No	
	Wet Areas	No	
Substrates	Concrete	Yes	
	Plywood	Yes	
	OSB	Yes	
	Recycled Rubber Underlayment	Yes	
	Well-Bonded Vinyl	Yes	
	Terrazzo	Yes	
	Ceramic Tile	Yes	
	Cement Backer Board	Yes	
	Gypsum Underlayments ¹	Yes	
	Cement Patch/Underlayment	Yes	
Flooring Types	Solid Hardwood	Yes	
	Engineered Hardwood	Yes	
	Bamboo	Yes	
	Cork	Yes	
	Parquet	Yes	
	Plywood	Yes	
	Ceramic Tile, Marble, Stone Inlays ²	Yes	
	Cure Time ³		
Light foot traffic		6 to 8 hours	
Normal foot traffic		8 to 12 hours	
Water Vapor Permeability ⁴		< 0.9	
Cured Physical Properties	Concrete Moisture Vapor Limits for subfloor moisture vapor protection:		
	For engineered hardwood		
	ASTM 1869 Calcium Chloride Method	≤ 15 lbs/ 1000 sq ft /24 hrs	
	ASTM 2170 Relative Humidity Test	≤ 87% RH	
	For solid hardwood or bamboo		
	ASTM 1869 Calcium Chloride Method	≤ 3 lbs/ 1000 sq ft /24 hrs	
	ASTM 2170 Relative Humidity Test	≤ 75% RH	
	Elongation	>180%	
	Service Temperature	-40°F to 150°F (-40°C to 66°C)	
	Application Properties	Ease of Troweling	Easy
Odor		Mild	
Open/Working Time ⁵		180 minutes	
Color		White	
Density (lbs/gallon)		13.7	
Percentage of Water ⁶		0%	
Percentage of Adhesive Coverage Required:		For Moisture Protection	For Bond
Engineered		95%	>80%
Solid		95%	>95%
Application Temperature		50°F to 100°F (10°C to 38°C)	
Chemical Properties	Chemistry Type	1-Part Urethane	
	Adhesive Type	Moisture Cure	
	VOC Compliant (measured per EPA Method 24)	Yes (20 g/L)	
	Flash Point, closed cup	145°F (63°C)	
LEED® v4 Contribution	IEQ - Low-Emitting Materials for Interior Adhesives & Sealants	Up to 3 Points ⁷	

¹ Dry, above grade
² Residential or light commercial only
³ Humidity affects cure to a greater degree than temperature; the higher the humidity, the faster the cure. Under normal conditions, light foot traffic is acceptable after 6 to 8 hours; normal traffic after 12-16 hours.
⁴ Per ASTM E-96 Standard Test Methods for Water Vapor Transmission of materials. Ratings are g/m²-24 hour-mmHG.
⁵ Please refer to the Open/Working Time Chart.
⁶ Per ASTM E203-01 Standard Test Method for water using Volumetric Karl Fischer Titration Method. Results rounded to the nearest tenth. Test Method has error range of +/- 0.2%.
⁷ Per LEED® v4 BD+C rating system, taking into account all other interior adhesives & sealants applied on site.

PRO-MSP

CHEMICAL & PHYSICAL PROPERTIES			
Chemical Properties	Chemistry Type	1-part MS Polymer Adhesive	
	Adhesive Type	Moisture Cure	
	VOC Compliant (calculated per SCAQMD Rule 1168)	Yes (33 g/L)	
	Solvent Free	Yes	
	Flash Point	>200°F (93°C)	
Use Environments	Residential	Yes	
	Offices/Light Commercial	Yes	
	Heavy Commercial/Retail	Yes	
	Hospital/Healthcare	No	
	Industrial	No	
	Exterior	No	
	Wet Areas	No	
Substrates	Concrete	Yes	
	Concrete Board	Yes	
	Concrete Patch/SLU	Yes	
	Gypsum Underlayment	Yes	
	Plywood	Yes	
	OSB	Yes	
	Ceramic Tile	Yes	
	Terrazzo	Yes	
Flooring Types	Well-Bonded Vinyl	Yes	
	Solid Hardwood	Yes	
	Engineered Hardwood	Yes	
	Bamboo	Yes	
	Cork	Yes	
	Parquet	Yes	
	Ceramic Tile, Marble, Stone Inlays* ¹	No	
Application Properties	Application Method	Trowel	
	Ease of Application	Easy	
	Odor	Slight	
	Required Flash Time	0 min	
	Open/Working Time* ²	60 min	
	Color	Brown	
	Density (lbs/gallon)	15.44	
	Wet Lay	Yes	
	Walk-On-Work prior to cure	No	
	Percent of Adhesive Coverage & Transfer Required	For MVER Protection	For Bond
	Engineered	100%	>80%
	Solid	100%	>95%
	Application Temp Range	50°F-90°F (10°C-32°C)	
	Shelf Life	1 year	
	Ease of Clean, Wet	Very Easy	
Cured Physical Properties	Ease of Clean, Cured	Easy	
	Dry Time: Light Traffic	6-8 hrs	
	Dry Time: Normal Traffic	12-24 hrs	
	Service Temp Range	-40°F to 150°F (-40°C to 66°C)	
	Elongation	>100%	
	Water Vapor Permeability* ³	<0.8	
	Concrete Moisture Vapor Limits for subfloor moisture vapor protection:		
	For engineered hardwood		
	ASTM 1869 Calcium Chloride Method	≤ 15 lbs/ 1000 sq ft /24 hrs	
	ASTM 2170 Relative Humidity Test	≤ 87% RH	
	For solid hardwood or bamboo		
	ASTM 1869 Calcium Chloride Method	≤ 3 lbs/ 1000 sq ft /24 hrs	
	ASTM 2170 Relative Humidity Test	≤ 75% RH	
Sound Reduction Performance	ASTM E492-09 IIC		
	6" concrete slab with no ceiling	50 dB	
	6"concrete slab with 1 layer 5/8" gypsum board ceiling	64 dB	
	ASTM E90-09 STC		
	6" concrete slab with no ceiling	53 dB	
6"concrete slab with 1 layer 5/8" gypsum board ceiling	61 dB		
^{*1} Light commercial and/or residential applications.			
^{*2} Please refer to Open/Working Time chart.			
^{*3} Per ASTM F1249 standard test method for water vapor transmission rate through plastic film and sheeting using a modulated infrared sensor. Batines are g/m ² -24 hr-mmoHG.			

^{*1} Light commercial and/or residential applications.

^{*2} Please refer to Open/Working Time chart.

^{*3} Per ASTM F1249 standard test method for water vapor transmission rate through plastic film and sheeting using a modulated infrared sensor. Ratings are g/m²-24 hr-mmHG.

LOCK A499

CHEMICAL & PHYSICAL PROPERTIES		
Use Environments	Offices/Light Commercial	Yes
	Residential	Yes
	Hospitality	Yes
	Hospital/Healthcare	Yes
	Heavy Commercial	Yes
	Exterior	No
	Wet Areas	No
Substrates	Concrete	Yes
	APA-Grade Plywood	Yes
	Gypsum Underlayment	Yes*
	Well-Bonded Vinyl	Yes
	Terrazzo	Yes
	OSB Underlayment	No
	Prepared Metal	No
Flooring Types	Asphalt	No
	LVT or LVP	Yes
	Sheet Vinyl	Yes
	VCT	Yes
	Carpet Tiles	Yes
	PVC Backings	No
	Olefin-Backed Vinyl	Yes
Cured Physical Properties	Rubber	No
	Linoleum	No
	Full Return to Service	24 hrs
	Rolling Loads Capacity	Moderate
	Slab Moisture Limits	99% RH (90% for sheet vinyl)
	pH Resistance	12.0 pH (10.0 for sheet vinyl)
	Ease of Troweling	Extremely Easy
Uncured Physical Properties	Odor	Slight
	Required Flash Time	10-20 minutes
	Working Time	4 hours
	Color	White
	Density (lbs/gallon)	8.3
	Freeze/Thaw	Do Not Freeze
Chemical Properties	Chemistry Type	Acrylic
	Adhesive Type	Pressure Sensitive
	VOC**	0 g/L
	Plasticizer Resistant?	Yes
	Solvent Free?	Yes
	Flash Point	>212°F

* Dry, above-grade applications only

** As calculated per SCAQMD Rule 1168





QUALITY PRODUCTS. QUALITY CARE.

LW Flooring puts our customers' best interest at the forefront.

If you need any assistance, we are here to help.

Reach out to us Monday - Friday, 8AM - 6PM EST.

