

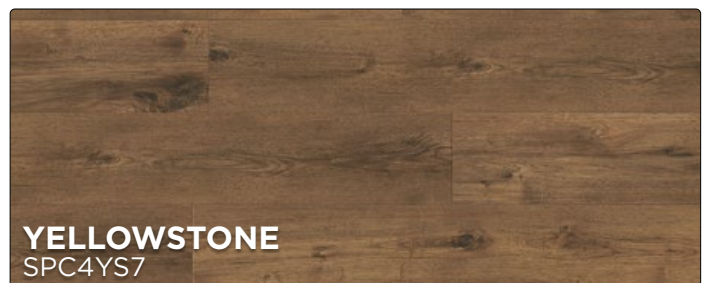
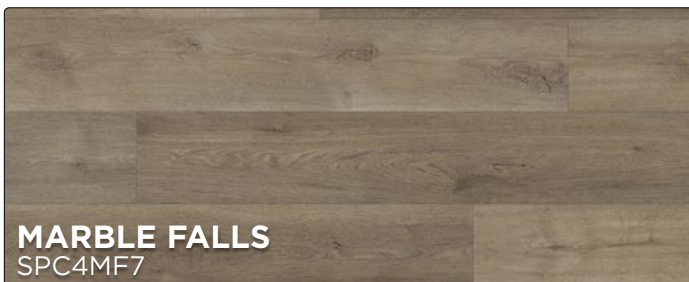
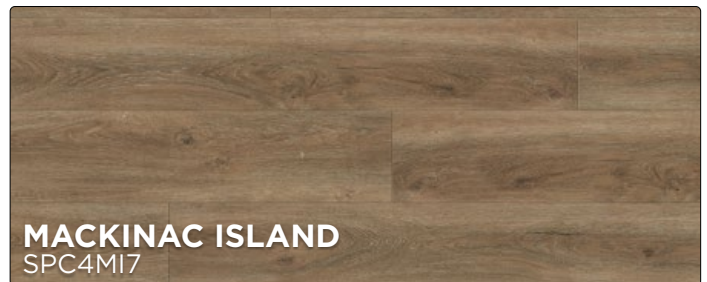
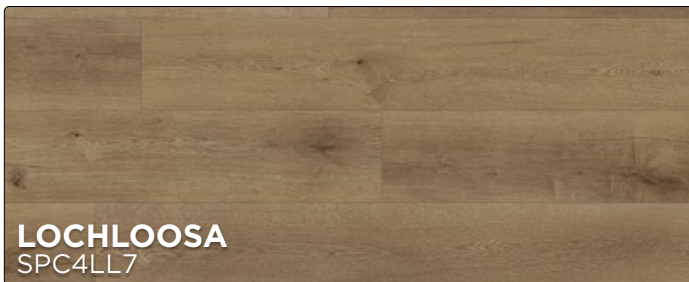


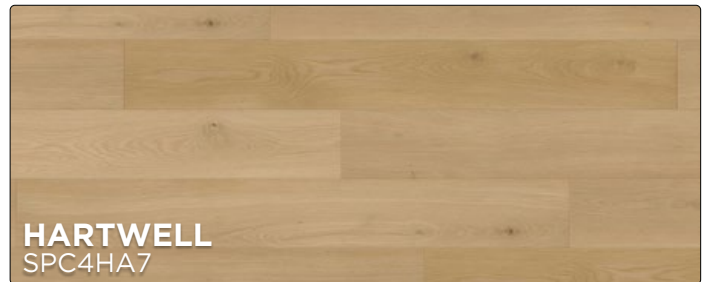


Offering popular hardwood visuals on 5.0mm thick, 7" x 48" planks backed by a 20-mil wear layer.  
It delivers sensible, low-maintenance waterproof performance with designer appeal.

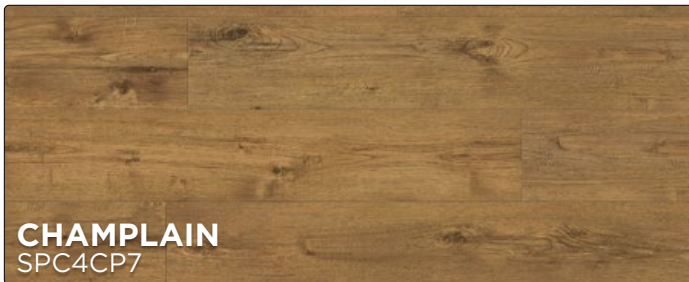


| Testing                                                        |                 |                               |
|----------------------------------------------------------------|-----------------|-------------------------------|
| Critical Radiant Flux                                          | ASTM E648       | Class I                       |
| Surface Flammability                                           | DOC FF 1-70     | Passed                        |
| Coefficient of Friction                                        | ASTM 2047       | Passed >0.6                   |
| Static Load Limit                                              | ASTM F970       | Exceeds 3000 lbs (No cushion) |
| STC Sound Testing*                                             | ASTM E492       | 71                            |
| IIC Sound Testing*                                             | ASTM E989       | 71                            |
| *Sound testing will vary depending upon floor/ceiling assembly |                 |                               |
| Floor Score Certified                                          |                 |                               |
| Phthalate Free                                                 |                 |                               |
| PVC                                                            | 100% Virgin PVC |                               |

| Specifications                            |                                                                                   |
|-------------------------------------------|-----------------------------------------------------------------------------------|
| Size                                      | 5.0mm x 7" x 48" Nominal                                                          |
| Wear Layer                                | 20 mil                                                                            |
| Finish                                    | Polyurethane                                                                      |
| Surface                                   | Embossed                                                                          |
| Edge Treatment                            | Painted Beveled                                                                   |
| Attached Cushion                          | 1.0mm EVA Backing                                                                 |
| Installation *(on, above, or below grade) | Click Lock, Click Floating Floor                                                  |
| Packaging                                 | 23.67 sq/ft per carton<br>1,420.20 sq/ft per pallet<br>60 cartons per pallet      |
| Warranty                                  | Lifetime Waterproof<br>Lifetime Residential Wear<br>15 Year Light Commercial Wear |
| *See full warranty at LWFlooring.com      |                                                                                   |




T-Molding




Threshold



Reducer



Flush  
Stairnose



Stair Tread  
Round Nose

| Molding Specifications |             |          |        |              |        |       |         |               |
|------------------------|-------------|----------|--------|--------------|--------|-------|---------|---------------|
| Profile                | W1<br>Width | W2       | W3     | T1<br>Height | T2     | T3    | Length  | Weight<br>Lbs |
| T-Molding              | 1-3/4"      | 3/8"     | 11/16" | 3/8"         | -      | -     | 92"     | 2.7           |
| Threshold              | 1-3/8"      | 3/8"     | -      | 3/8"         | 3/16"  | -     | 92"     | 2.7           |
| Reducer                | 1-3/4"      | -        | -      | 3/8"         | 3/16"  | -     | 92"     | 2.7           |
| Flush Stairnose        | 4-5/16"     | 3-13/16" | -      | 1"           | 13/16" | 5mm   | 92"     | 5.5           |
| Stair Tread Round Nose | 12"         | -        | -      | 1-1/5"       | 7/8"   | 5/16" | 47-1/4" | 7.17          |

| Item Code       |           |           |          |                 |                        |
|-----------------|-----------|-----------|----------|-----------------|------------------------|
| Color           | T-Molding | Threshold | Reducer  | Flush Stairnose | Stair Tread Round Nose |
| Bayfield        | SPC4BATM  | SPC4BATH  | SPC4BARD | SPC4BASN        | SPC4BASTR              |
| Breaux Bridge   | SPC4BBTM  | SPC4BBTH  | SPC4BBRD | SPC4BBSN        | SPC4BBSTR              |
| Champlain       | SPC4CPTM  | SPC4CPTH  | SPC4CPRD | SPC4CPSN        | SPC4CPSTR              |
| Hartwell        | SPC4HATM  | SPC4HATH  | SPC4HARD | SPC4HASN        | SPC4HASTR              |
| Lochloosa       | SPC4LLTM  | SPC4LLTH  | SPC4LLRD | SPC4LLSN        | SPC4LLSTR              |
| Mackinac Island | SPC4MITM  | SPC4MITH  | SPC4MIRD | SPC4MISN        | SPC4MISTR              |
| Marble Falls    | SPC4MFTM  | SPC4MFTH  | SPC4MFRD | SPC4MFSN        | SPC4MFSTR              |
| Sandpoint       | SPC4SPTM  | SPC4SPTH  | SPC4SPRD | SPC4SPSN        | SPC4SPSTR              |
| Victoria        | SPC4VITM  | SPC4VITH  | SPC4VIRD | SPC4VISN        | SPC4VISTR              |
| Yellowstone     | SPC4YSTM  | SPC4YSTH  | SPC4YSRD | SPC4YSSN        | SPC4YSSTR              |