

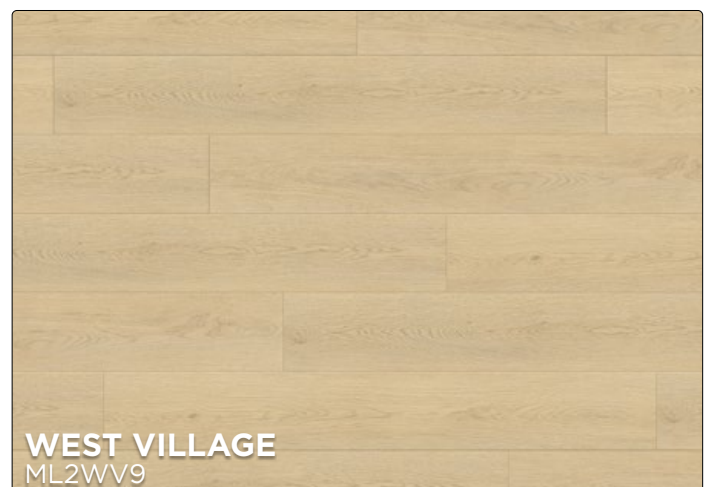
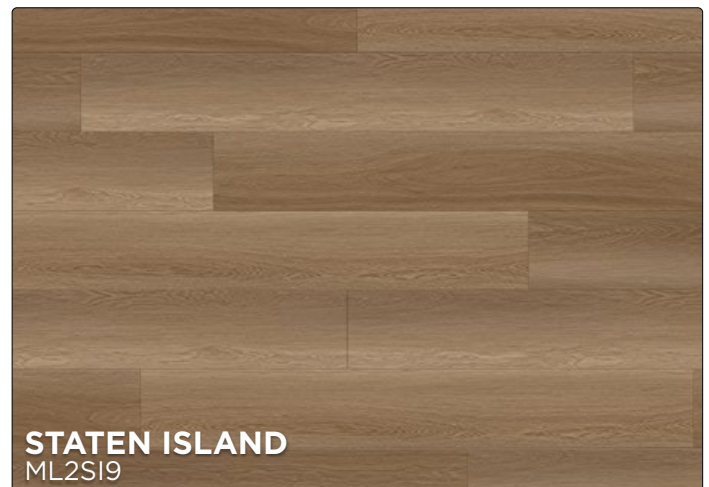
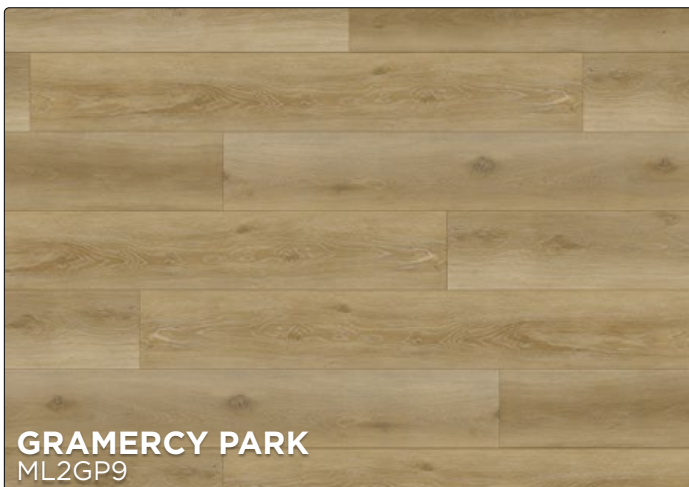


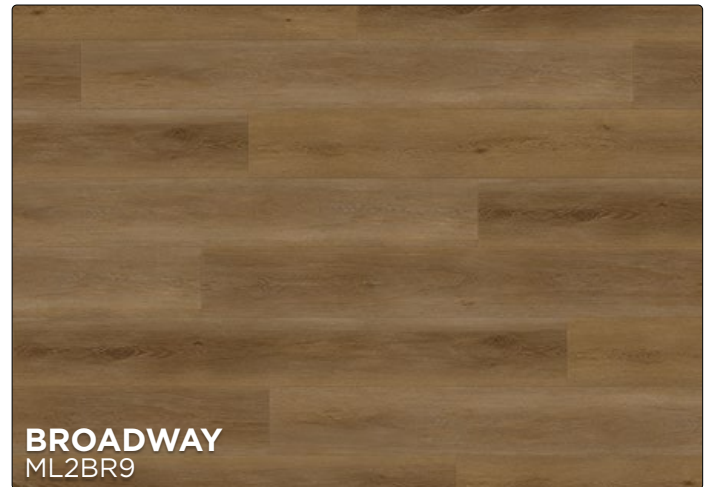

Combining sleek 9" x 60" dryback glue-down planks with a 2.5mm thickness and a 20-mil wear layer. It provides a modern urban aesthetic that withstands heavy demands with water-resistant reliability.

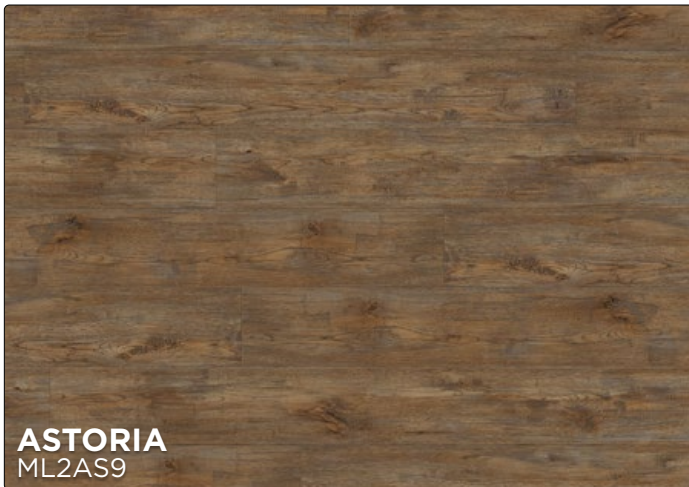

Testing			
IIC Sound Testing*		56	
Fire Rating (European Fire Classification)		Class Bfl-S1	
Wear Resistance (Rotations)	(EN 649:2011)	1.6 mm³/100 revolutions	
NALFA Castor Chair (25000 Cycles)		PASS	
Peel Resistance (ENISO 24324:2012)	Longitudinal Direction: 95n/50mm		Cross Direction: 90n/50mm
Resistance to Heat (ASTMF1514-03)		ΔE*ab: 0.8	
*Sound testing will vary depending upon floor/ceiling assembly			
Floor Score Certified			
Phthalate Free			

Specifications	
Size	2.5mm x 9" x 60"
Wear Layer	20 mil
Finish	Polyurethane
Surface	Embossed (Gramercy - Embossed in Register)
Edge Treatment	Micro Bevel
Architect Folder	S-MLUAFD
Installation *(on, above, or below grade)	Glue Down, Dryback
Packaging	44.88 sq/ft per carton 2,513.28 sq/ft per pallet 56 cartons per pallet
Warranty	Lifetime Residential Warranty 25 Year Commercial
*See full warranty at LWFlooring.com	

