


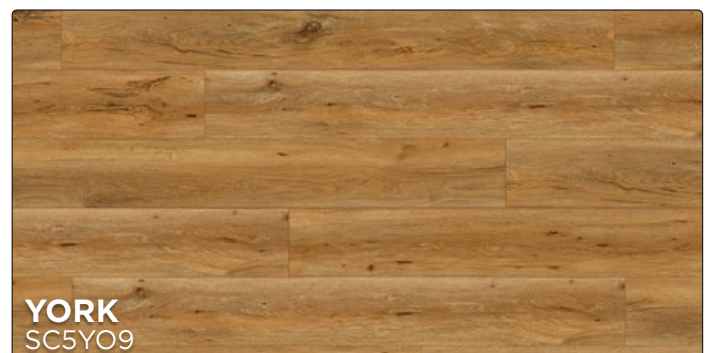
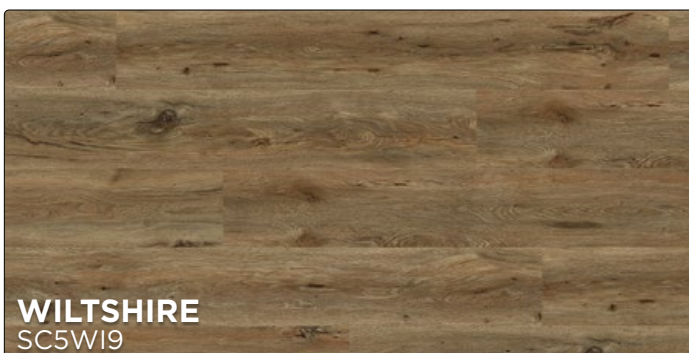


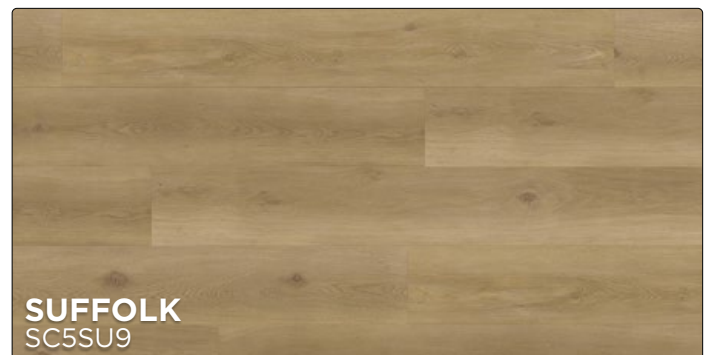

Designed as a flexible loose-lay LVP, this 5mm thick, 9" x 60" collection utilizes a "tough as nails" 20-mil wear layer. It delivers seamless, versatile installation and lasting style for both commercial and residential projects.

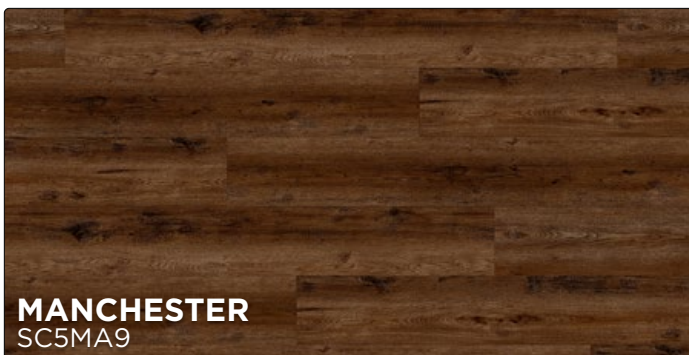

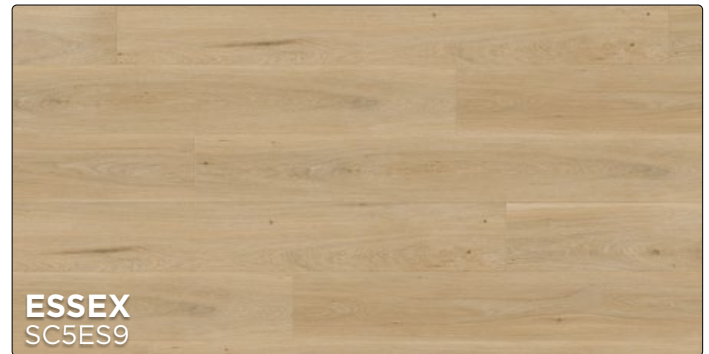

FACT SHEET



Testing		
Formaldehyde Rating	EN717-1 (California Sec. 01350)	Class E1 (Passed)
Total VOC	California Sec. 01350	Passed (A+)
Fire Rating	Bf1-S1	Passed
Static Load Limit	ASTM F970-07	250 lbf .048mm
Heat Resistance	ASTM F1514-03	0.8
	Floor Score Certified	
	Phthalate Free	
	Fiberglass Enhanced Core	

Specifications	
Size	5mm x 9" x 60"
Wear Layer	20 mil
Finish	Polyurethane
Surface	Embossed/Embossed in Register
Edge Treatment	Micro-Beveled/Square Edge
Color Variation	Medium
Light Sensitivity	Low
Installation *(on, above, or below grade)	Loose Lay / Glue Down
Packaging	22.41 sq/ft per carton 1,165.32 sq/ft per pallet 52 cartons per pallet
Warranty	Lifetime Residential Warranty 15 Year Commercial

*See full warranty at LWFFlooring.com

